NOAA Technical Memorandum NWS HYDRO 37



DERIVATION OF INITIAL SOIL MOISTURE ACCOUNTING PARAMETERS FROM SOIL PROPERTIES FOR THE NATIONAL WEATHER SERVICE RIVER FORECAST SYSTEM

Office of Hydrology Silver Spring, Md. March 1978 Reprinted November 1980

#### NOAA TECHNICAL MEMORAMDUMS

#### National Weather Service, Office of Hydrology Series

The Office of Hydrology (HYDRO) of the National Weather Service (MMS) develops procedures for making river and water supply forecasts, analyzes hydrometeorological data for planning and design criteria for other agencies, and conducts pertinent research and development.

NOAA Technical Memorandums in the NWS HYDRO series facilitate prompt distribution of scientific and technical material by staff members, cooperators, and contractors. Information presented in this series may be preliminary in nature and may be published formally elsewhere at a later date. Publication 1 is in the former series, Weather Bureau Technical Notes (TN): publications 2 through 11 are in the former series, ESSA Technical Memorandums, Weather Bureau Technical Memorandums (WBTM). Beginning with 12, publications are now part of the series, NOAA Technical Memorandums, NWS.

Publications listed below are available from the National Technical Information Service, U.S. Department of Commerce, Sills Bldg., 5285 Port Royal Road, Springfield, Va. 22161. Prices on request. Order by accession number (given in parentheses). Information on memorandums not listed below can be obtained from Environmental Science Information Center (D822), NOAA, 6009 Executive Boulevard, Rockville, MD 20852.

#### Weather Bureau Technical Notes

TN 44 HYDRO 1 Infrared Radiation From Air to Underlying Surface. Vance A. Myers, May 1966, 35 pp. (PB170664)

#### ESSA Technical Memorandums

- WBTM HYDRO 2 Annotated Bibliography of ESSA Publications of Hydrometeorological Interest. J. L. H. Paulhus, February 1967, 20 pp. (Superseded by WETM HYDRO 8)
- WBTM HYDRO 3 The Role of Persistence, Instability, and Moisture in the Intense Rainstorms in Eastern Colorado, June 14-17, 1965. F. K. Schwarz, February 1967, 21 pp. (PB174609)
- WBTM HYDRO 4 Elements of River Forecasting. Marshall M. Richards and Joseph A. Strahl, October 1967, 61 pp. (Superseded by WBTM HYDRO 9)
- WBTM HYDRO 5 Meteorological Estimation of Extreme Precipitation for Spillway Design Floods. Vance A. Myers, October 1967, 29 pp. (PB177687)
- WBTM HYDRO 6 Annotated Bibliography of ESSA Publications of Hydrometecrological Interest. J. L. H. Paulhus, November 1967, 27 pp. (Superseded by WBTM HYDRO 8)
- WBTM HYDRO 7 Meteorology of Major Storms in Western Colorado and Eastern Utah. Robert L. Weaver, January 1968, 75 pp. (PB177491)
- WBTM HYDRO 8 Annotated Bibliography of ESSA Publications of Hydrometeorological Interest. J. L. H. Paulhus, August 1968, 25 pp. (Superseded by NWS HYDRO 22)
- WBTM HYDRO 9 Elements of River Forecasting (Revised). Marshall M. Richards and Joseph A. Strahl, March 1969, 57 pp. (PB185969)
- WBTM HYDRO 10 Flood Warning Benefit Evaluation--Susquehanna River Basin (Urban Residences). Harold J. Day, March 1970, 42 pp. (PB190984)
- WBTM HYDRO 11 Joint Probability Method of Tide Frequency Analysis Applied to Atlantic City and Long Beach Island, N.J. Vance A. Myers, April 1970, 109 pp. (PB192745)

## NOAA Technical Memorandums

- NWS HYDRO 12 Direct Search Optimization in Mathematical Modeling and a Watershed Model Application. John C. Monro, April 1971, 52 pp. (COM-71-00616)
- NWS HYDRO 13 Time Distribution of Precipitation in 4- to 10-Day Storms--Ohio River Basin. John F. Miller and Ralph H. Frederick, July 1972, 41 pp. (COM-72-11139)
- NWS HYDRO 14 National Weather Service River Forecast System Forecast Procedures. Staff, Hydrologic Research Laboratory, December 1972, 7 chapters plus appendixes A through I. (COM-73-10517)

(Continued on inside back cover)

## NOAA Technical Memorandum NWS HYDRO 37

DERIVATION OF INITIAL SOIL MOISTURE ACCOUNTING PARAMETERS FROM SOIL PROPERTIES FOR THE NATIONAL WEATHER SERVICE RIVER FORECAST SYSTEM

Bobby L. Armstrong

Office of Hydrology Silver Spring, Md. March 1978





## CONTENTS

Abstrac	et
I.	Introduction 1
	A. Background
	B. Objectives
II.	Review of literature 5
III.	Initial parameter derivation components 5
	A. Soil Conservation Service soil survey estimated engineering properties 5
	B. National Weather Service river forecast system soil moisture accounting parameters 6
IV.	Derivation of equations to compute soil moisture parameters8
V.	Basin application
	A. Council Creek verification program output 17
VI.	Conclusions
	A. Recommendations for future work
Acknow	ledgments43
Refere	nces
Append	ix I. Computer program listing of NWSRFS soil moisture accounting subroutine 45
	TABLEC
1.	TABLES Nomenclature
2.	SCS infiltration rates
3.	Specific yields
4.	Coefficients of permeability
5.	Percolation exponents
6.	Renfrow estimated engineering soil properties 14
7.	Zaneis estimated engineering soil properties 15
8.	Vernon estimated engineering soil properties 15
1.	FIGURES Flow diagram of NWSRFS catchment model 4
2.	Daily percolation rate curve8
3.	Soil survey interpretation9
4	Test basin man 13

# DERIVATION OF INITIAL SOIL MOISTURE ACCOUNTING PARAMETERS FROM SOIL PROPERTIES FOR THE NATIONAL WEATHER SERVICE RIVER FORECAST SYSTEM

Bobby L. Armstrong Tulsa River Forecast Center, National Weather Service, NOAA, Tulsa, Okla.

ABSTRACT. The method developed in this research will provide the initial soil moisture accounting parameters for the National Weather Service River Forecast System. The parameters will be physically consistent between basins and subareas of basins. In this study, each parameter used in the conceptual runoff model is investigated, and a computational procedure relating to soil properties is developed. Parameters are derived (for Council Creek near Stillwater, Okla.) and used in a computer verification program.

This study demonstrates a practical and useful solution for obtaining soil moisture accounting parameters from soil properties. The effectiveness of this procedure can be increased by using it in conjunction with the parameters derived from basin hydrographs. Although the parameters derived from soil properties produce an excellent initial simulation, the optimum parameters may be found only by a trial and error approach that must be computerized because of the complexity of the model. By the use of this method, the number of trial and error attempts will be greatly decreased, and a considerable savings of man-hours and computer time will result.

## I. INTRODUCTION

## A. Background

The basic and probably the most important component of a river forecasting procedure is the rainfall-runoff relation that converts precipitation amounts to the volume of water observed in the stream channel. The maximum benefit derived from an accurate river forecast that predicts flooding occurs when the time between forecast issuance and flood is the greatest since this gives the maximum reaction time to take protective measures to save lives and property. A good rainfall-runoff relation will provide the maximum possible benefit since it will be possible to issue a forecast as soon as the rainfall is observed and reported. If it is necessary to adjust the forecast hydrograph by the use of observed river stages, the reaction time can be greatly reduced.

A number of methods have been developed to convert rainfall to runoff. The philosophy to use the simplest procedure that will give good results has often been followed especially before the widespread use of computers. Operational rainfall-runoff relations

ranged from a procedure that would give runoff as a percentage of rainfall to coaxial relationships which would include such input as week of the year, duration of rainfall, antecedent precipitation index, and amount of rainfall.

Runoff values derived from soil moisture models that are conceptual in nature relate to actual processes in nature. They are designed to reproduce all components of flow and generate continuous hydrographs. Models of this type are complex since a considerable number of parameters are used. The parameters can be approximated from hydrographs or from observed basin characteristics. By the use of soil moisture models, forecasts can be prepared for water quality, water supply, and soil moisture levels for agriculture as well as for floods. Parameters to forecast a basin are usually developed by computer programs that analyze a given period of record with a given set of soil moisture accounting parameters. The basis of the approach is that past responses of the river are keys to the future responses. It is very important that a full range of soil moisture conditions be observed over the selected period of record which usually has a dura-

AD	Total area of "D" Classification soils (mi <sup>2</sup> )	P	Permeability (in./hr)
AD IMC	Additional impervious contents (mm)	PBASE	Maximum flow lower free water zones produce (mm/day)
AD IMP	Additional impervious parameter (%)	PCTIN	Percent impervious (%)
AWC BA	Available water capacity (in./in.)  Total basin area (mi <sup>2</sup> )	PFREE	Percolation water percentage to low- er free water zones (%)
CFS	Cubic feet per second	RA	Area of riparian vegetation (mi²)
D	Average distance from edge of basin	REXP	Percolation exponent
17	to nearest stream (ft)	RSERV	Lower free water reserved (%)
DEFR	Lower zone soil moisture deficiency	SA C	Average surface area of stream (mi²)
ET	(%) Evapotranspiration (mm/day)	SARVA	Fraction of basin covered by water and riparian vegetation (%)
I	Infiltration (in./hr)	SAW	Area of basin covered by streams and
ΚΙ	Coefficient for saturated area along		lakes (mi²)
	stream	SCS	Soil Conservation Service
Kp LZ	Coefficient of permeability(gpd/ft²)  Lower zone	SCST	Supplemental computed soil thickness (in.)
LZFPC	Lower zone primary contents (mm)	SIDE	Ratio of unobserved to observed base flow (%)
LZFSC LZFPM	Lower zone supplemental contents(mm)  Lower zone primary maximum (mm)	SSOUT	Flow lost from total channel flow (m³/s)
LZFSM	Lower zone supplemental maximum (mm)		
LZP	Permeability of LZFSM thickness	TSPT	Total soil profile thickness (in.)
LLF	(in./hr)	UCST	Upper computed soil thickness (in.)
LZPK	Lower zone primary drainage rate (%/day)	USDA	United States Department of Agriculture
LZSK	Lower zone supplemental drainage	UZFWC	Upper zone free water contents (mm)
	rate (%/day)	UZFWM	Upper zone free water maximum (mm)
LZTWC	Lower zone tension water contents (mm)	UZK :	Upper zone drainage rate (%/day)
LZTWM	Lower zone tension water maximum(mm)	UZP	Permeability of UZFWM thickness (in./hr)
N	Average number of days interflow observed	UZTWC	Upper zone tension water contents (mm)
NWS	National Weather Service	UZTWM	Upper zone tension water maximum(mm)
NWSRFS	National Weather Service River Fore- cast System	ZPERC	Percolation factor (%)

<sup>\*</sup>Pertinent terms are included. The interested reader should contact the author for any term not listed above.

tion of several years. After a simulated hydrograph set is produced from the initially selected parameters, it is compared to the observed hydrograph set. Differences between the hydrograph sets are noted, and manual changes are made in the soil moisture accounting parameters to improve the correlation; then another computer run is made with revised parameters. This procedure is

complex; it must be repeated many times until an optimum fit between the observed and simulated hydrographs is obtained. Obviously, the closer the initial parameters are to the optimum, the quicker the basin can be modeled. Hence, computer time and many manhours are saved. Also, if all the initial parameters are realistic, there is a greater probability that all of the optimum parame-

ters will be conceptually correct. Modeling of a basin not only consists of changes in the soil moisture accounting parameters but also may include the histogram, routing, evapotranspiration, and precipitation.

The U.S. National Weather Service (NWS) in developed a river forecast system (NWSRFS) that will be used by their River Forecast Centers in making operational forecasts. (See table 1.) The system (Staff, Research Laboratory, 1972) in-Hydrologic cludes a catchment model that uses a soil moisture accounting system. In 1974, the moisture accounting system used in the NWSRFS was changed to the catchment model developed at the NWS Sacramento, Calif., River Forecast Center by Burnash et al. (1973). The system has the proven capability of producing top quality forecasts. The Sacramento system shown in figure 1 defines two layers, upper and lower, with each layer consisting of free water and tension water storages. A percolation equation that moves water from the upper to lower zone is an important component of the system. A total of 17 soil moisture accounting parameters are used to simulate streamflow. Many of the parameters are interrelated. To produce a hydrograph, the model uses a histogram that can have areal zones assigned to specific histogram elements. It is, therefore, possible to select a set of parameters for each areal zone that consists of different hydrologic characteristics. Since the parameters have been developed to simulate high and low flows, the model should perform equally well on streamflows of all magnitudes. The operational use of the model is dependent on the availability of high speed computers since the numerous and time-consuming calculations that are performed for each basin cannot be done manually on a real-time basis with procedures now available.

Since the modeling of a basin is an extremely time-consuming process and the area to be modeled is extensive, any method to decrease the time spent on each basin would be extremely valuable. One of the best approaches is to obtain a set of initial parameters as conceptually valid as possible. The method (Peck 1976) to obtain beginning parameters from an observed hydrograph set over a period of record as long as 10 yr has been used with some success, but it has several drawbacks. The hydrograph method is dependent on the lower zones being totally saturated within the selected period of record, which rarely occurs in some regions. Also, it is necessary to have streamflow records available to even get started, and it is not really possible to deal with discontinuities across the basin. By the development and use of a physical characteristic method, similar basins can be modeled with similar parameters. Consequently, the division of gaged basins to conform with definite discontinuities is possible as well as obtaining parameters for basins that are totally ungaged.

The most available source of measurements for a physical characteristic model is the estimated engineering soil properties derived by the U.S. Soil Conservation Service (SCS). Published soil surveys on a county basis are often available. Soil survey interpretations for specific soils are also available. The most apparent soil properties that are applicable to conceptual models are permeability, available water capacity, infiltration, USDA texture, and shrink-swell potential.

The soil property derivation method was developed and tested in Oklahoma and Kansas. There were no radical changes in climate, topography, or land use within the area of development. The developed method was not intended to replace or even supersede the derivation of parameters from a hydrograph set (Peck 1976). The separation of hydrograph components is and always has been an important phase of hydrologic analysis. Remember that there will be a parameter set available from the soil property computations for the first calibration run (semilog plot). The soil property parameter set can then be compared to the observed hydrographs, and such parameters as LZPK and LZSK can be calculated quickly for the second run. Hence, there is a place for the use of both methods if streamflow records are available. The two methods are the most applicable to headwater basins.

## B. Objectives

The objectives of this research are to relate the soil moisture accounting parameters used in the NWSRFS to the engineering soil properties that are readily available in SCS soil surveys, to provide a numerical procedure to derive initial soil moisture parameters for use in modeling a basin, and to apply a derived parameter set to an actual basin. The soil derivation method is the first attempt of this type; it points a direction rather than defining the ultimate solution.

In section II, the overall theory of the NWSRFS Catchment Model is supported by the hydrologic literature. The work previously done to obtain initial soil moisture accounting parameters is defined. In section III, the SCS soil properties used for the parameter derivations and the soil moisture accounting parameters are discussed. The equations that have been developed to compute the parameters in this research are

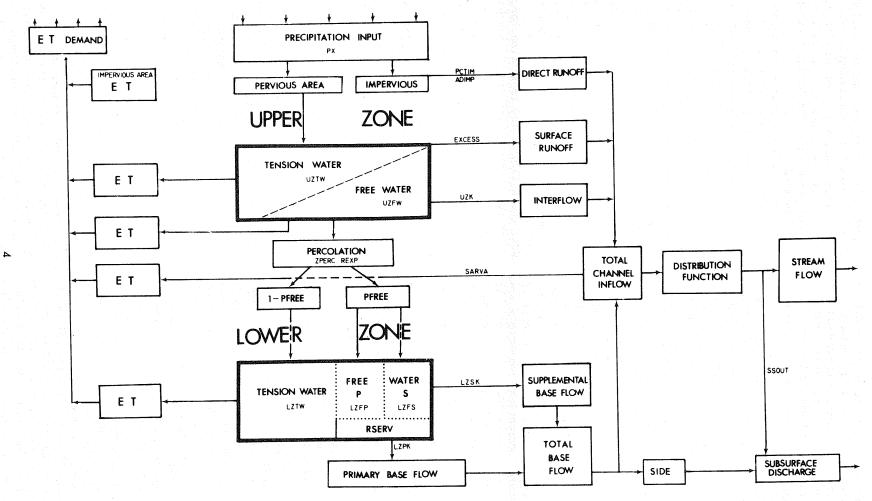


Figure 1.--Flow diagram of the NWSRFS catchment model (from Peck 1976)

presented in section IV. In section V is a demonstration of the use of the derived equations and the application of the derived parameters on an actual basin. The computer listing of the NWSRFS Soil Moisture Accounting Subroutine in appendix I contains the equations used in the computation of runoff increments and the contents of the model zones. Any question on a specific process can be ultimately answered after following it through the computer program.

## II. Review of Literature

Methods of converting rainfall to runoff have changed from single event approaches described by Linsley et al. (1958) to the present conceptual models that became practical with the advent of modern high-speed computers. The present soil moisture accounting system used by the National Weather Service in the NWSRFS was developed at the Sacramento River Forecast Center in Sacramento, Calif.

In 1971, Burnash and Ferral were developing a river forecast system that would represent streamflow in a physically consistent manner. A hydrologic model by Burnash et al. (1973) was presented (giving simplified approximations of natural processes) that was consistent with soil moisture profiles determined by experimental studies (Hanks et al. 1969 and Green et al. 1970). The system was to correspond with observed characteristics of moisture movement through the soil mantle that included the formation and transmission of the wetting front.

The NWSRFS is basically a two-level model. Todd (1959) described soil water zones that included the profile from the surface through the major root zone and an intermediate zone which was the profile from the lower edge of the soil water zone to the upper limit of the capillary zone of the water table. Both zones include capillary, gravitational, and hygroscopic water.

Evapotranspiration is limited to the depth that roots will penetrate. George et al. (1957) reported that, in an area of 22.5 in. of annual rainfall, 97.3% of the roots of all plants were growing in the upper 4 ft of soil. Richards and Richards (1957) reported that the roots of most plants would not enter wet saturated soils and high water tables limit root penetration and even kill roots which had penetrated below the current water table level before it experienced an upward movement. The removal of water from the tension water zones in the NWSRFS conceptual model is accomplished through evapotranspiration. Hence, the zones should be limited to the depth of root penetration.

Peck (1976) presented a procedure that expanded upon the previous method to derive

initial parameters from an observed hydrograph set and then applied the parameters to a basin. Four parameters were said to be readily computed, six parameters were considered more difficult to derive, one parameter could be estimated from maps, two paramaters would be substituted from a nearby basin, and nominal starting values were used for three.

The conceptual model used by the NWSRFS should relate to the engineering soil properties of a basin. The actual use of soil properties in deriving parameters for the model has not been described in the literature.

## III. INITIAL PARAMETER DERIVATION COMPONENTS

The Soil Conservation Service (SCS) estimated engineering properties of soils will be used to derive the initial NWSRFS soil moisture accounting parameters. All components must be defined and evaluated before a procedure to relate the components will be meaningful.

A. Soil Conservation Service Soil Survey Estimated Engineering Properties

Soil profiles are divided into layers that are significantly different for purposes of soil engineering. Engineering soil properties are given for each layer.

Soil texture is given in standard USDA terms. It relates to the relative percentage of sand, loam, and clay.

Available water capacity (AWC) is defined as the ability of soils to hold water for use by most plants. The value of AWC is considered to be the difference between the amount of water at field capacity and the amount at the wilting point of most crop plants. Units commonly used are inches of water per inch of soil. Hence, an AWC of 0.17 would mean that 0.17 of an inch of water would wet the soil to a depth of 1 in. AWC values are given in many county soil surveys and soil survey interpretations.

Shrink-swell potential is the extent to which the soil shrinks as it dries out and swells when it gets wet. A high shrink-swell potential will greatly reduce the downward movement of water if the layer is wet.

Permeability is the quality of a soil that enables it to transmit water or air. Values do not take into account lateral seepage or such transient features as plowpans and surface crusts. Units commonly used are inches of soil that the water moves through per hour.

Infiltration rate is defined as the minimum rate at which water penetrates the surface of the soil at any given instant, usually expressed in inches per hour. Infiltra-

Table 2.--SCS infiltration rates

Soil type Inches	of water per hour
A Harris Harris His	0.45-0.30
$B = \{ 1, 2, \dots, 2^{k+1} \} $	.3015
С	.1505
D .	.0500

tion rates are widely used by the SCS in estimating runoff from rainfall for watershed planning. Table 2 relates soil type to infiltration with the lower limit being used for clays, the average value for loam, and the upper limit for sand. Original SCS classifications were made from rainfallrunoff data obtained from small watersheds. or infiltrometer plots. The majority of the soils classified are compared to profiles already classified to determine the soil type. The theory is that similar soils will produce the same amount of runoff during heavy rainfall. Assumptions made in the classification are that the soil surfaces were bare, maximum swelling had taken place, and rainfall rates exceeded surface intake rates. The SCS (1964) has given group classifications to more than 4,000 soils in the United States and Puerto Rico.

Soil type A is defined as soils (low runoff potential) having high infiltration rates even when thoroughly wetted and consisting chiefly of deep, well to excessively drained soils or gravels. The soils have a high rate of water transmission. Soil type B is defined as soils (moderately low runoff having notential) moderate infiltration rates when thoroughly wetted and consisting chiefly of moderately deep to deep, moderately well to well drained soils with moderately fine to moderately coarse texture. The soils have a moderate rate of water transmission. Soil type C is defined as soils (moderately high runoff potential) having slow infiltration rates when thoroughly wetted and consisting chiefly of soils with a layer that impedes the downward movement of water, soils with moderately fine to fine texture, or soils with moderate water tables. The soils are somewhat poorly drained. Soil type D is defined as soils (high runoff potential) having very slow infiltration rates when thoroughly wetted and consisting chiefly of clay soils with a high swelling potential, soils with a permanent high water table, soils with a claypan or clay layer at or near the surface, and shallow soils over nearly impervious materials.

B. National Weather Service River Forecast System Soil Moisture Accounting Parameters

### Description

Percent impervious (PCTIM) is the permanently impervious fraction of the basin contiguous to the stream channel. Manmade impervious areas such as paved parking lots with direct drainage to the stream, areas of impervious rock formation outcrops near the stream, and the actual surface area of the stream would be considered to be the basin area to be assigned to PCTIM. This component of runoff referred to as impervious runoff will be produced from a given rainfall regardless of the dryness of the soil and is computed as a percentage of the rainfall. A small rise in the stream following a prolonged dry spell would be composed of PCTIM runoff.

Additional impervious (ADIMP) is the fraction of the basin that becomes impervious as all tension water requirements are met. This parameter relates to an increase of impervious area as the saturated area of the basin increases. A small stream rise after a very wet period and after the upper zones have dried enough to intake additional rainfall would be composed of ADIMP runoff.

Upper zone tension water maximum (UZTWM) is the depth of water that must be filled in the nonimpervious area before any water is available to other storages. Water retained as capillary water as well as surface detention would be included in this storage. Since this zone must be filled before there is any response by the stream, a specific amount of rainfall could be computed from rainfall amounts that occurred and did not produce a stream response any greater than the impervious contribution.

Upper zone free water maximum (UZFWM) is the depth of water that would be filled over the nonimpervious portion of the basin in excess of UZTWM. The content of this zone is made available for interflow after percolation and evaporation requirements are fulfilled. Any overflow of this zone is surface runoff. Derivation of the parameter from a hydrograph set is not feasible. It is usually determined through trial and error.

Drainage rate (UZK) is the upper zone lateral drainage rate that is expressed as the ratio of the daily withdrawal to the available contents of the upper zone free water. The parameter value is related to the length of time that interflow occurs after a storm of considerable runoff. UZK cannot be directly determined from a hydrograph analysis. It has been suggested that a rough es-

$$0.10 = (1 - UZK)^{N}$$
 (1)

where N is the average number of days that interflow is observed.

Lower zone tension water maximum (LZTWM) is the maximum capacity of the lower zone tension water. This parameter is very difficult to extract from the hydrograph set. LZTWM would be the capillary water retained in the lower zone that does not become streamflow but is removed through evapotranspiration. It, therefore, represents the water that will be removed by existing plants during dry periods.

Lower zone supplemental maximum (LZFSM) is the maximum capacity of the lower zone free water storage. The flow from this storage is the supplemental base flow and is the faster response component of the base flow. This parameter may be derived from the hydrograph set if the zone is saturated during

the period of record being modeled.

Lower zone supplemental drainage rate (LZSK) is the lateral drainage rate of the lower zone supplemental free water expressed as a fraction of contents per day. LZSK may be derived from the hydrograph set.

Lower zone primary maximum (LZFPM) is the maximum capacity of the lower zone primary free water storage. The flow from this storage is the primary base flow and is the slower response component of the base flow. This parameter may be derived from the hydrograph set if the lower zone is saturated during the period of record being modeled.

Lower zone primary drainage rate (LZPK) is the lateral drainage rate of the lower zone primary free water expressed as a fraction of contents per day. This parameter may be derived from the hydrograph set. Variations in daily evaporation during base-flow conditions, especially during days of high temperatures, will sometimes cause problems in deriving the rate from the observed base

PBASE is the maximum flow that the subsurface zones are capable of producing as base flow. If the lower zones are saturated, PBASE would be the maximum percolation. PBASE, an important component of the percolation equation, is not an input parameter but is computed from

$$PBASE = (LZFPM \cdot LZPK + LZFSM \cdot LZSK).$$
 (2)

DEFR is the lower zone soil moisture deficiency. The number, used in the percolation equation, is not an input parameter but is computed from

$$DEFR=1-\left(\frac{LZTWC+LZFPC+LZFSC}{LZTWM+LZFPM+LZFSM}\right)$$
(3)

where LZTWC is the contents of the lower zone tension water; LZFPC, the contents of the lower zone primary water; and LZFSC, the contents of the lower zone supplemental

Percolation factor (ZPERC) is a value used to define the proportional increase in percolation from a saturated to a dry condition. The initial value of ZPERC is usually estimated.

Percolation exponent (REXP) determines the rate at which the percolation demand changes from the dry condition to the saturated condition. The initial value of REXP is usually estimated.

Percolation water percentage (PFREE) is the percentage of percolation water that directly enters the lower zone free water without a prior claim by lower zone tension water. If the hydrographs at a basin return quickly to the same base flow that was present before the rise, a small value of PFREE would be indicated.

Lower free water reserved (RSERV) is the fraction of lower zone free water not available for resupplying lower zone tension water. The initial value is estimated.

SARVA is the fraction of the basin covered by water and riparian vegetation areas.

SIDE is the ratio of unobserved to observed base flow. This parameter represents the ground water that does not appear at the river gage. The value is usually 0.

SSOUT is a fixed rate of discharge lost from the total channel flow. The value is usually 0.

## Interrelation

The interrelation of parameters in the model greatly increases the complexity of reaching the optimum parameters. A conceptual model that truly relates to nature with the many interactions which take place must contain such an interrelationship. The heart of the conceptual model is the percolation equation, and a complete understanding of the equation is important to successfully model a basin. There are eight model parameters that affect the percolation equation; and by changing any one of them, the percolation curve (fig. 2) will change. The equation controls the movement of water in both the upper and lower zones and is influenced by the movement of water in all parts of the profile. The parameters directly involved

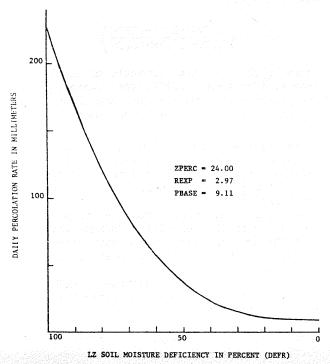


Figure 2.--Daily percolation rate curve

in the formula are LZFPM, LZPK, LZFSM, LZSK, ZPERC, LZTWM, REXP, and UZFWM. The percolation equation is

daily percolation rate=PBASE 
$$x(1+ZPERC \cdot DEFR^{REXP})$$
. (4)

The shape of the percolation curve is determined by the REXP parameter that will influence the percolation between 0 and 100% deficiencies. The maximum percolation will occur at 100% deficiency and is defined by

The minimum percolation occurs at zero deficiency and is equal to PBASE. By determining the value of DEFR (eq 3) at the beginning of a storm and plotting the point in relation to the percolation curve (fig. 2), the percolation to the lower zones may be increased or decreased to yield the desired amount of runoff necessary to produce the best fit with the observed hydrograph. If the simulated hydrograph crest is too high, the percolation should be increased; or if the hydrograph crest is too low, the percolation should be decreased. By increasing or decreasing percolation, the volume of water to be dealt with in the lower zones will also be changed. Each hydrograph rise throughout the entire simulation period should in turn be plotted in relation to the percolation curves so a decision can be made as to how

the parameters should be changed to produce the best fit with the percolation curve. It is important that a full range of DEFR values be found in the given simulation period since it would be difficult to adjust the curves with values at one extreme or the other. The derivation of the optimum parameters for a basin will depend heavily on the use of the percolation curve.

# IV. DERIVATION OF EQUATIONS TO COMPUTE SOIL MOISTURE PARAMETERS

A priority need of the highest order is a method of determining parameter values so they will be physically consistent between basins and subareas of basins. The goal of a conceptual model is to relate to the physical processes in nature. Hence, a source of physical soil properties must be found that is available for most areas. The source used is the SCS engineering soil properties found in their county soil surveys or soil survey interpretations. Figure 3 is an example of the format of a typical soil survey interpretation and shows the information usually presented.

Equations to compute 12 of the 17 parameters required by the model were developed in this research. The equations and procedures are defined in this section. A 13th parameter is found by using table 5. The computed parameters, which are initial values, will not be the optimum because of the obvious variations in nature, the lack of available soil properties for the computational need of each parameter, and the probable inability of the model equations to exactly and realistically reproduce every possible flow component. The derivation procedure will attempt to use the measurements readily available in a realistic manner. Since past experiences in engineering are considered in making the estimates, recent SCS county soil surveys (Swafford 1967) rather than the SCS soil survey interpretations should be used whenever possible. Remember that the magnitude of UZTWM, LZTWM, and the evapotranspiration curve could be strongly influenced if the rainfall input does not describe the true basin precipitation. All thicknesses must converted millimeters to (25.4 mm/in.) for use in the available computer programs.

UZTWM by definition is closely related to available water capacity. UZTWM must be filled before any water is available for free water (gravity water), and the water is ultimately removed only through evapotranspiration. Available water capacity is the maximum amount of water held in the soil after gravitational water has drained away and after the rate of downward movement of water has materially decreased. An obvious

MLRA(S): 78, 50 REV. WER.FRB, 10-76 TYPIC USTOCHREZTS, FINE, MIXED, THERMIC

THE VERNON SERIES CONSISTS OF MODERATELY DEEP, WELL DRAINED NEARLY LEVEL TO STRONGLY SLOPING SOILS OF UPLANDS.

THE SOIL FORMED IN CLAYEY SHALE OR CLAY. IN A REPRESENTATIVE PROFILE. THE SURFACE LAYER IS REDDISH BROWN CLAY ABOUT B INCHES THICK. THE SUBSUL IS RED CLAY AND EXTENDS TO A DEPTH OF 21 INCHES. THE SUBSTRATUM IS DARK RED CLAY. SLOPES PANGE FROM 1 TO 12 PERCENT.

					ESTI	MATED_SO	IL PR	OPER	TIES (A)								
EPTH	usn	A TEXTURE	ļ	JNIFIED		1	AAC	нто					MATER			LIQUID   LIMIT	
		- TEXTORE	i			i							0_1_			1	INDE
0-8			CL. CH			A-6.			. !				100 90				20-3
0-8			CL			A-6.			1				100 90 100 90				117-34
8-21  1-60			ICL + CH			A-6.			- 1				100 65				120-3
	J		1			"			. i	•	1	:		:		i	i
			1						<del></del> 1.		1					1	
	PERMEAS					INITY			COR	ROSIV	ITY		ION   WI				
14-11	(IN/H	R)   WATER CA		(PH)	(		SWE POTEN		STEEL	Ico	NCRETE		<u>DRS</u>  ER				
0-8	<0.0			7.9-8.4	†	- 1	HIG		HIGH		LCW		2				
0-8	0.06-0	.2   0.12-0	•17	7.9-8.4	İ	- i	HIG	н	HIGH	- 1	LOW.	1.32	2	6			
8-21	<0.0 <0.0			7.9-8.4	1 .	-!	HIG		HIGH		LOW	1-32					
1-60	<0.0	b   00	• 10	7.9-8.4	1	- :	HIG	'n	HIGH	- 1	LOW	1.32					
i		i	i		<u>i                                     </u>	i			i	i_		نــن					
		FL OOD ING				WATER T			CEMENT			BEDR				E HAD	
	UENCY	1 DUDATION	LMONT	<del></del> •		KIND	MONT	- 3		ARDNE	2	- 1	ARDNES			TAL GRP	
	ONE	DURATION	MONT	HS [ {FI   ≥6.			†		(10)		17-71			-1145	$n$ $\mu$	101	ACTIO
		SANITARY		LES(B)		·		<del></del>					E_MATE				
EDTIC	TANK	SEVERE-PERCS	SLOWLY				1	ļ		Į P	DOR-SH	RINK-	SWELL.	LOW S	TRENG	ГН	
	PTION						i	i R	JADF ILL	- 1							
FIE		$z = (z_1, \ldots, z_n)^{n-1} \cdot e^{-\alpha z_n}$					·i	i ^		· i							
	<u></u>			<del></del>			نـــــ	<del>-</del>		<del>ļ</del>							
SEW	AGE I	1-2%: SLIGHT	F-SI 00F				!	l		Į U	NSUITE	D-E XC	ESS FI	NES			
LAG		7+%: SEVERE-S					:	1	SAND	i							
ARE								i		j							
	ļ							1		Ļ							
CANT	TARY	SEVERE-TOO CL	AYEY				ļ	1		ļυ	NSUITE	D-EXC	ESS FI	NES			
	FILL					,		11	GRAVEL -	i							
(TRE	NCH)						j	i i		i							
								<del>   </del>									
SANI	TARY	1-8%: SLIGHT 8-12%: MCDERA	TF-SI NP	E									R-T00		:Y /EY•SL(	nes :	
	FILL	O IZAL PODERA	112 320						OPSOIL				CLAYEY			J. L.	
(AR	EA)						- i	i		i							
	<del>-</del>							<del>   </del>									
DAI	LY	POOR-TOO CLAY						H				WATE	R MANA	GEMEN	4T		
COVER	FCR						i	i i		5	LIGHT						
LAND	FILL		* · · · *					11	POND	1							
								I RE	SERVOIR AREA	!							
		COMMUNITY	DEVELO	PMENT I	(8)			li	ARCA	1 1							
	1	SE VERE-TOO CL						1		M	ODERAT	E-HAR	D TO F	PACK			
SHAL									ANKMENT								
X C A VA	TIONS						i		KES AND LEVEES	- 1							
	i							1	LEVEES	1							
	Ī	SEVERE-LOW ST	RENGTH.	SHRINK-S	SWELL			1		l s	EVERE-	ND WA	TER				<del></del>
DWELL						•			CAVATED	1							
WITH							į		PONDS	. !							,
BASEM	CN15							i jagu Li	IFER FE	ן ע ווי							
	<u>†</u>	SEVERE-LOW ST	RENGTH,	SHRINK-S	SWELL			11			OT NE	EDED					<del></del>
DWELL				100				11		i							
	TH			1			-		RAINAGE	- 1							
BASEM	ENIS							! ! ! !		1.							
		1-8%: SEVERE-	LOW STR	ENGTH. SH	HRINK	-SWELL		i i			LCW II	TAKE	PERCS	SLOW	LY.DRO	UGHTY	
SMA		8+%: SEVERE-S								1	1 7		. 7.7			- · · ·	
	RCIAL								RIGATIO	N I							
BUILD	INGS							 		į .							
		SEVERE-LOW ST	RENGTH.	SHRINK-S	SWELL			11			AVORA	BLE					
LOC									ERRACES								
	AND								AND	_ !							
STRE	ETS }							D1	VERSION	5							
LAW	NS. I							<del> </del>		+	ROLGH	TY.PF	CS SL	DWL V.	SL OPF		
	APING								GRASSED								
	GOLF								MATERWAY	s i							
	WAYS !							Н	- 1	ľ							
FAIR																	

Figure 3.--Soil survey interpretation

problem must be resolved before a solution can be determined. The use of a standard thickness was considered, but a given zone would obviously not be thick enough for soils of high permeability and not thin enough for soils of very low permeability. Also, the soil profile changes with a subsequent change in permeability so an approach to the problem is apparent. Since the drainage rates used in the model are in daily increments, the permeability (in./hr) times 24 hr is a logical approach. Exception would be a layer of moderate to high shrink-swell potential within the computed depth; thus the zone thickness is the calculated thickness or the depth to a moderate to high shrink-swell potential layer whichever is less. If the computed zone thickness exceeds the depth of the entire soil profile, then the soil profile thickness will be used. If the soil profile or areal coverage consists of soils of different characteristics, the computations must contain the correct percentage of each to obtain an overall correct parameter. The computation equation is

$$UZTWM = (25.4) (AWC) (UCST)$$
 (6)

where UZTWM is the upper zone tension water maximum (mm); AWC, the available water capacity (in./in.); and UCST, the upper computed soil thickness (in.).

LZTWM is the capillary water retained in the lower zone that is not available to the free water of the lower zones. Water is removed only through evapotranspiration; consequently, the zone would be restricted to the depth of root penetration. The thickness of the zone is considered to be the soil profile below the upper zone tension water computed depth. If the zone includes a thick clay layer with a high shrink-swell potential, the computed value will tend to be much too high since the total thickness would not be saturated by percolated water. The computation equation is

$$LZTWM = (25.4) (AWC) (TSPT-UCST)$$
 (7)

where LZTWM is the lower zone tension water maximum (mm); AWC, the available water capacity (in./in.); TSPT, the total soil profile thickness (in.); and UCST, the upper computed soil thickness (in.).

UZFWM is related to the gravitational water in the soil that drains away after the available water capacity is full. The volume as used in the model must first fill the percolation requirements of the lower zones; and then the remaining volume is removed to satisfy the daily interflow requirement. If the water remaining exceeds the capacity of the zone, it is the computed surface runoff.

The same UCST as used in the UZTWM is used in the UZFWM equation. The equation to compute UZFWM uses a ratio of the infilitration rate of rainfall to the permeability. If the ratio approaches a value of 1, a maximum free water volume for the computed soil thickness would be indicated. A ratio of 1 or greater would indicate a quick response of interflow, and the ratio volume must be set at 1 in the equation. As the ratio becomes smaller and smaller, the free water in the soil would approach a minimum value. The computation equation is

$$UZFWM = [25.4] \left[ \left( \frac{1}{P} \right) (UCST) \right]$$
 (8)

in which UZFWM is the upper zone free water maximum (mm); I, the infiltration (in. of water/hr); P, the permeability (movement of water through in. of soil/hr); and UCST, the upper computed soil thickness (in.). A range of values are usually given for permeability. The smallest value is used for a high shrink-swell potential and the largest value for a low shrink-swell potential.

UZK must be derived from parameters that indicate vertical flow rather than lateral flow so a relationship must be attempted. The daily volume of interflow will be equal to water present in the upper zone free water times UZK; accordingly, a value of UZK that is larger than the actual will tend to give a large component of interflow and decrease surface runoff. The ratio of infiltration to permeability was used since the larger the value, the larger the component of interflow. The value of UZK computed would tend to be the maximum to be expected. UZK should never be greater than 1. The computation equation is

$$UZK = \frac{\text{infiltration}}{\text{permeability}} \tag{9}$$

where UZK is the upper zone drainage rate (%/day).

LZFSM should be computed with the same approach as that used for the UZFWM. The thickness (SCST) should be computed by multiplying the permeability from the computed UCST downward by 24 hr or the thickness to a higher shrink-swell potential layer whichever is less. The computation equation is

LZFSM=[25.4][
$$\left(\frac{\text{infiltration}}{\text{permeability}}\right)$$
(SCST)] (10)

where LZFSM is the lower zone supplemental maximum (mm) and SCST is the supplemental computed soil thickness (in.).

LZSK is the daily lateral drainage rate from the lower zone supplemental free water storage that produces a component of base

flow in the stream. The flow has been defined as having a source of flow different from the primary flow and is observed on the hydrograph as the recession immediately following the surface runoff and the interflow. The LZFSM flow could be visualized as the flow that would emerge through the surface zone as the upper zone volume was depleted. This would give the necessary lag to the flow and would be most logical if the supplemental zone were limited by a moderate to high shrink-swell zone. By definition, the upper zone is considered to be depleted when the capacity has decreased to 10% of the maximum, which is an estimate of hygroscopic water that cannot be removed naturally. Hence, a constant to relate to the upper zone depletion and the subsequent flow from the lower zone can be found. The computation equation is

$$LZSK = \frac{UZK}{1.9 + (0.9) \left(\frac{UZP}{LZP}\right)}$$
 (11)

where LZSK is the lower zone supplemental drainage rate (%/day); UZP, the permeability of the UZFWM thickness (in./hr); and LZP, the permeability of the LZFSM thickness (in./hr).

LZFPM is the storage that supplies the volume for base flow in the stream. Since the interrelationship of all the natural processes is very complex, a logical approach to the maximum volume in the zone is needed. If a high water table level is to remain constant, there must be a balance between inflow and outflow of the aquifer. Specific yield is the ratio of water that will drain freely from the material to the total volume of the formation. The specific yield (Linsley et al. 1958) of clay is 3% and sand is 25%. Table 3 was developed by interpolating the values. An approach will be taken that the lower zone storage is equal to the specific yield of the lower zone thickness. The layer thickness for LZFPM is the total soil profile minus the upper zone and supplemental zone thickness-

Table 3.--Specific yields

Soil classification Spec	ific y	ield (%)
	3	
Silt loam	9	l de la francia. El francia de la celebrate
Loam Coam Coam Coal Care Coam Coam Coam Coam Coam Coam Coam Coam	14	
Sandy loam	20	
Sand	25	

## es. The computation equation is

where LZFPM is the lower zone primary maximum (mm); TSPT, the total soil profile thickness (in.); UCST, the upper computed soil thickness (in.); and SCST, the supplemental computed soil thickness (in.).

LZPK is a parameter that through definition will be computed with difficulty from the soil properties available. In areas of a relatively shallow soil profile, the lateral drainage rate is related to the coefficient of permeability (Kp) that is defined in Linsley et al. (1958) as the discharge in gallons per day (gpd) through an area of 1 ft² under a gradient of 1 ft/ft at 60°F. By considering the lower zone thickness, the lateral rate of flow may be determined. Table 4 was developed by interpolating the coefficients of permeability (Walton 1970) for clay and sand.

LZPK is computed by determining the ratio of the coefficient of permeability to the average distance from the edge of the basin to the nearest tributary of the stream. The soil classification can be determined from the soil profile and the correct Kp value selected. It has been noted that the LZPK computed by the developed equation will tend to be the minimum limit. The computational equation is

$$LZPK = \frac{(Kp) (0.134)}{D}$$
 (13)

where LZPK is the lower zone primary drainage rate (%/day); D, the average distance from the edge of the basin to the nearest tributary (ft); and Kp, the coefficient of permeability (gpd/ft²).

ZPERC may be calculated from parameters already computed. Note that, if any of the five parameters used in the equation are unrealistic, the computed ZPERC value may be in error by a rather large amount. The maximum percolation is believed to take place when the upper zones are full and the lower

Table 4.--Coefficients of permeability

Soil classification	Kp (gpd/ft <sup>2</sup> )
Clay	2
Silty loam	750
Loam	1,500
Sandy loam	2,250
Sand	3,000

zones are empty. It, therefore, will be assumed that the maximum daily percolation will be the maximum contents of the lower zones. By substitution into the maximum percolation rate equation and assuming 100% deficiency in the lower zones, the computation equation is

$$ZPERC = \frac{LZTWM + LZFSM + LZFPM - PBASE}{PBASE}$$
 (14)

where ZPERC is the percolation factor (%). REXP is the exponent determining the rate of change of percolation from a dry condition to a saturated condition of the lower zones. The value of REXP may be related to the soil classification of the soil profile at the base of the upper zone. The minimum permissible REXP value of 1.0 would indicate an almost constant decrease of percolation as the lower zone deficiencies decrease and would relate to a sand. A large REXP would indicate a rapid decrease of percolation as the zones become saturated such as is expected in a clay. REXP values (table 5) have been estimated for each soi l classification.

PCTIM is the impervious area of the basin and would obviously consist of the surface area of the stream. Impervious areas of the basin adjacent to the stream such as paved parking lots and possibly urbanized areas should be added. A value of 0.001 is a good initial value for headwater basins without known impervious areas greater than the surface area of the stream is known, the computation equation is

$$PCTIM=KI\left(\frac{SA}{BA}\right) \tag{15}$$

where PCTIM is the percent impervious (%); KI, the coefficient for estimated additional area adjacent to the stream that is saturated at all times; SA, the average surface area of the stream (mi²); and BA, the total basin area (mi²).

Table 5.--Percolation exponents

Soil classification	REXP
Sand	1.0
Sandy loam	1.5
Loam	2.0
Silty loam	3.0
Clay, silt	4.0

ADIMP is the additional area of the basin that becomes impervious as the tension water requirements are met. Peck (1976) suggested that remote sensing techniques using radiation measurements (infrared) could define the area of the basin to be assigned as ADIMP. Since measurements of this type are not readily available, another system has been devised. The soils of the basin with a hydrologic soil classification of D have a minimum saturation infiltration value of 0 that would indicate an impervious area when saturated. An obvious approach would be to consider the area of D soils as the ADIMP area. Since clays have a minimal specific yield of 3%, a value of 0.03 is subtracted from the D soil percentage of the total area. Thus,

$$ADIMP = \left(\frac{AD}{BA}\right) - 0.03 \tag{16}$$

where ADIMP is the additional impervious parameter (%); AD, the total area of D soils  $(mi^2)$ ; and BA, the total basin area  $(mi^2)$ .

SARVA provides for the removal of water from the stream by evapotranspiration. If the riparian vegetation area of the basin is not known, an estimate could be made. Consequently,

$$SARVA = \frac{RA + SAW}{BA}$$
 (17)

in which SARVA is the fraction of the basin covered by water and riparian vegetation; RA, the area of riparian vegetation  $(mi^2)$ ; BA, the total basin area  $(mi^2)$ ; and SAW, the area of the basin covered by streams and lakes  $(mi^2)$ .

PFREE is the percentage of water that bypasses the lower zone tension water requirements and is placed directly in the lower
zone free water. The component apparently is
the water that follows paths through fissures, cracks, faults, or along an impervious layer to escape the capillary demands of
the soil. Since a logical manner of derivation of PFREE is not apparent, a nominal
value of 0.30 is assumed.

RSERV is the fraction of the lower zone free water that is not available for resupplying tension water. Since a logical manner of deriving RSERV is not apparent, a nominal value of 0.30 is assumed.

SIDE and SSOUT are usually assumed to be zero as an initial value. If obvious channel losses are evident, a value could be determined from known volume losses.

### V. BASIN APPLICATION

A set of parameters will be derived from the developed equations for Council Creek near Stillwater, Okla. The parameters for a gaged basin are intended to be the initial soil moisture accounting parameters that will be used in a trial and error computer program to develop the optimum parameters. If a basin is not gaged, the parameters should give adequate results. Optimum parameters developed for another basin with the same engineering soil properties could be used successfully, but it is important that the original parameters be as conceptually correct as possible to avoid proliferating a number game.

Council Creek is located in Payne County and is a tributary of the Cimarron River. The area is in the undulating to rolling prairie area of North-Central Oklahoma. The prevailing climate is of continental origin, but relatively temperate. Pronounced seasonal variations in both temperature and precipitation are characteristic of the area. Spring is the season of the heaviest rains with a secondary maximum in early fall. The area averages about 53 thunderstorms per year. Average annual rainfall is 32.5 in. The basin is in the great grassland area of the United States. Post and blackjack oaks are found on the ridgetops. Trees such as cottonwood, elm, and hackberry grow in narrow fringes along the creek.

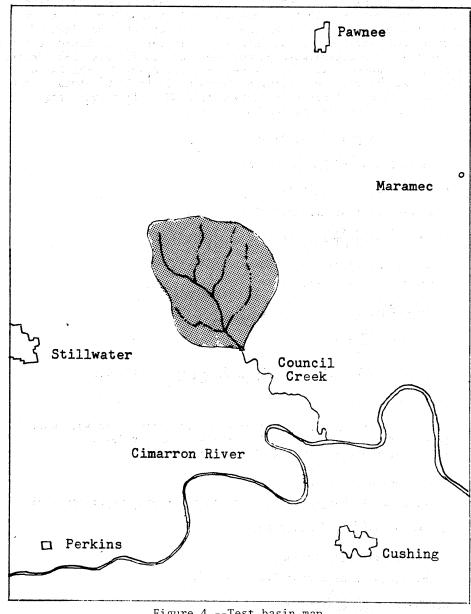


Figure 4.--Test basin map

Table 6.--Renfrow estimated engineering soil properties (soil classification D)

		ermeability (in./hr)	Available water (in./in.)	capacity	Shrink- swell
Silt loam	0-12	<0.05	0.14		Low
Clay	12-42	< .05	.17		High

The Council Creek basin (fig. 4) has a drainage area of 13 mi<sup>2</sup>. The gage is a water-stage recorder with a concrete control. Datum of the gage is 838.28 ft. Bankfull stage is 10 ft, which is a flow of 2,200 CFS. On October 2, 1959, a crest of 25,000 CFS (18.9 ft) was observed.

The area is underlain by interbedded sandstone and clay beds. The soils are susceptible to erosion damage, and good range management is necessary to prevent damage. The soil association of the basin is the Renfrow-Zaneis-Vernon. The soils vary from C to D type. The permeability ranges from a maximum of 0.50 to a minimum of less than 0.05 in./hr, and available water capacity from a minimum of 0.14 to a maximum 0.17 in. of water per inch of soil. The variations of the estimated engineering soil properties in the basin should test the efficiency of the derivations. The approximate percentages of soils are 58% Renfrow, 30% Zaneis, and 12% Vernon. Parameters will be derived in millimeters for the basin.

The Renfrow series is extensively distributed through central Oklahoma, south-central Kansas, and north-central Texas. Table 6 is derived from SCS soil survey data.

The soil parameter calculations for the Renfrow series are:

upper zone depth=
$$(0.03)(24)$$
=0.72,  
UZFWM= $(25.4)\left(\frac{0.03}{0.03}\right)(0.72)$ =18.29,  
UZTWM= $(25.4)(0.14)(0.72)$ =2.56,  
supplemental zone depth= $(0.03)(24)$ =0.72,  
LZFSM= $(25.4)\left(\frac{0.03}{0.03}\right)(0.72)$ =18.29,  
LZFPM= $[25.4][(0.09)(10.6)+(0.03)(30)]$ =47.09,  
LZTWM= $[25.4][(0.14)(11.3)+(0.17)(30)]$ =169.72,  
UZK= $\left(\frac{0.03}{0.03}\right)$ =1.0,  
LZSK= $\frac{1.0}{(1.9)+(0.9)(1)}$ =0.357,  
LZPK= $\left[\frac{(10.6)(750)}{40.6}+\frac{(30.0)(1)}{40.6}\right]\left[\frac{0.134}{(0.6)(5280)}\right]$ =0.008, and  
REXP=3.0.

The Zaneis soil is distributed extensively through south-central Kansas, central Oklahoma, and north-central Texas. Table 7 is derived from SCS soil survey data.

The soil parameter calculations for the Zaneis series are:

upper zone depth=
$$(0.50)(24)=12$$
 (shrink-swell changes to moderate in the depth, upper zone= $10$ ), UZFWM= $(25.4)\left(\frac{0.10}{0.50}\right)(10)=50.80$ , UZTWM= $(25.4)(0.14)(10)=35.56$ , supplemental zone depth= $(0.50)(24)=12$ , LZFSM= $(25.4)\left(\frac{0.10}{0.50}\right)(12)=60.96$ , LZFPM= $(25.4)(0.09)(25)=57.15$ ,

Table 7.--Zaneis estimated engineering soil properties (soil classification C)

USDA texture		Permeability (in./hr)	Availabl (i	e water n./in.)				rink- swell
Loam	0-10	0.50		0.14	, -	1975 - 1871.		Low
Clay loam	10-47	.50		.17			Mod	erate

Table 8.--Vernon estimated engineering soil properties (soil classification D)

USDA texture	Depth (in.)	Permeability (in./hr)	Available water capaci (in./in.)	ty Shrink- swell
Clay	0-10	<0.05	0.17	Moderate- high

LZTWM= 
$$(25.4) (0.17) (37) = 159.77$$
,  
UZK= $\frac{0.10}{0.50} = 0.20$ ,  
LZSK= $\frac{0.20}{1.9 + (0.9) (1)} = 0.071$ ,  
LZPK= $\frac{(750) (0.134)}{(0.6) (5280)} = 0.0317$ , and  
REXP=2.5.

The Vernon soil is moderately distributed in west-central Texas and western Oklahoma. Table 8 is derived from SCS soil survey data.

The soil parameter calculations for the Vernon series are:

upper zone depth=
$$(0.03)(24)$$
=0.72,  
UZFWM= $(25.4)\left(\frac{0.03}{0.03}\right)(0.72)$ =18.29,  
UZTWM= $(25.4)(0.17)(0.72)$ =3.11,  
supplemental zone depth= $(0.03)(24)$ =0.72,  
LZFSM= $(25.4)\left(\frac{0.03}{0.03}\right)(0.72)$ =18.29,  
primary zone depth= $10$ -0.72-0.72=8.56,  
LZFPM= $(25.4)(0.03)(8.6)$ =6.55,  
LZTWM= $(25.4)(0.17)(9.3)$ =40.16,  
UZK= $\frac{0.03}{0.03}$ =1.00,  
LZSK= $\frac{1.00}{1.9+(0.9)(1)}$ =0.357,  
LZPK= $\frac{(1)(0.134)}{(0.6)(5280)}$ =0.00004, and  
REXP=4.0.

The basin soil moisture accounting parameters may now be calculated with the contribution of each soil type equal to its areal distribution. The basin soil parameters are:

## Nominal values are:

PFREE=0.30,

RSERV=0.30,

SIDE-0.00,

SSOUT=0.00,

SARVA=0.001, and

PCTIM=0.001.

The Verification Program Output for Council Creek that follows shows a comparison between the observed hydrographs represented by a "O" and the simulated hydrographs represented by an "\*." The hydrograph sets are printed on the same time base so that they can be compared easily. The simulated and observed flows in cubic feet per second as well as the rainfall in inches are printed on the right-hand side of the hydrograph pages for each day. The statistics for the verification run are printed on the last page.

The simulated hydrograph set produced by the derived parameters is an excellent initial run. The parameters derived could be used successfully for the basin if it were not gaged since none of the parameter derivations were dependent on rainfall or streamflow records. The number of trial and error computer runs required to obtain an optimum solution should be minimal.

## A. Council Creek Verification Program Output

#### COUNCIL CREEK NR STILLWATER OKLA

COUNCIL CREEK NEAR STILLWATER OKLA

FLOW-POINT PARAMITERS

O. FLOW-POINT NAME AREA-SQ KM K SSOUT OBSER JOMPAR SIXIN HISTOGRAMS
1 COUNCIL CR 80.30 6.00 0.00 1 1 0 TIME-DELAY .931 .068 .001
GAGE AREA 1 1 1

QUIL-MOISTURE ACCOUNTING PARAMETERS COUNCIL CREEK NR STILLWATER OKLA

CONTENT AND CAPACITY VALUES ARE IN MM.

UPPER ZONE AND IMPERVIOUS AREA PARAMETERS

ADIMP AREA NO. AREA I.D. AREA NAME PX-ADJ PE-ADJ UZTWM UZFWM UZK PCTIM SARVA - 1 M8P 1 COUNCIL CREEK 1.000 1.000 13. .760 .001 .001

PERCOLATION AND LOWER ZONE PARAMETERS

AREA NO. PBASE ZPERC REXP LZTWM LZFSM LZFPM LZSK LZPK PFREE RSERV SIDE 1 9.1 24.0 2.97 151. 31. 45. .2710 .0151 .30 .30 0.00

PE-ADJUSTMENT OR ET-DEMAND FOR THE 16TH OF EACH MONTH

INITIAL STORAGE CONTENTS

AREA NO. UZTWC UZFWC LZTWC LZFSC LZFPC ADIMC 1 0. 0. 10. 0. 0. 11.

			PLOT		COUNC		_				R YEAR	1959	0.1	*=SIM	LATED	0= 1600.	OESE	RVED		NITS-CF 2000.		SIM.	OBS. RAI!	W+MELT
0CT-		200.	. 0	400	• 0	600.		80	0.0	10		120		170			, ,	2000	,	•		0.0	0.0	.02
2 *									•		•		•		•			•	•	•		0.0		.00
3 *		•		4 4 4 £					•		•		:	100				10.		:		0.0	0.0 0	.00
5 *		•		•		:			•				•	4.		•			,	•		0.0		.00
é *		٠		٠.		٠.			•		. • e sg		• ;	1815	•				•	•		0.0	0.0 0	.00
7 *		•		•		•			•		•		•		•							0.0	0.0 0	.00
9 *		•		•		•		grafia.	•		•		•	1 1	•	•			•	•		0.0		.00
10 *		•		•		•			•		•		•		•	•						0.0		.00
11 *		•				•			:							V .		·	,			,1	0.0	.28
13 +		•		•		•			•		•		•		• 145			!	•	•		0.0	0.0 0	.00
14 *		•		•	•	•			•		• •		•		•	•	4.		•	•		. 2	0.0	. 26
16 *		:		•	, -						. • . • • •	2 1 1 1 1	•		• Alama				•	•		.0		.00
17 *					•	•			•		•		•		•	•			•	•		0.0		.00
18				•			11.5		• .		:		:		•				•	:		0.0	0.0 0	.00
20	Para					e a de la composición dela composición de la composición dela composición de la composición de la composición de la comp			:				•			•			•	•		0.0		.00
21	<b>.</b>	•		•	•	. •			•		•		•		• 4,55	•			•			0.0		.00
22 4		•									•		•	1 1 7.4	•	. :			•			0.0	0.0 0	.00
24	k				,				•		•		•		•	•			•	•		0.0		.00
25 1	<b>.</b>	•		•	•	•			• .		•		•		•	•			•	•		0.0		.00
26 4	# #	:		,	•	. :			:		:		:		:				•	•		0.0	0.0	.01
28	K	•			•	•			•		•		•		•	•			•	•		0.0		.00
29		•		•	•	•			•		•		•		•	•			•	•		0.0		.00
30		:		,	•	•			•		:		:		•	:			•			0.0	0.0 0	.00
1 :	4	•			• ,	•			•		•		•		•	•			•			0.0		.00
2 1		•			•	•			•		•		•		•	•			•			0.0	0.0	.00
4 :	*	:		,	•	•					·		•		•				•	•		0.0		.00
5	•	•			•	•			•				•		•	•			•	•		0.0		0.00
6	*	:			•	•			•		•		•		•	•			•			0.0	0.0	.00
8	*				•				•		•		•		•	•			•	•		0.0		0.00
9 10	-	•			•	•			•		•		•		•	•			•	:		0.0		0.00
11	*	•			•	•					•		•				7.3	Series .	• • .			0.0		0.00
12	*				•	•			•		•		•		•	•		and the same	• 11.	•	- * *	.1	0.0	.00 .13
13	*	•			•	•			•		•		•		• 10 mm / N				•	:		. 0	0.0	.00
15	*	•	,		•	•			•		•	100	. •	4.84 3.22	•	•			•	•		0.0	0.0	.00 .35
16	*			47.5	•	•			. •		•		•		•	•	١.		•	•		.2	.3 1.5	.35
17	*	•			•	•			•		•		•		•							1.8	.9	0.00
19	*		•		•						•		** •		•	•			•	•		1.4		0.00 D.00
20	*	•	•		•	•			•		•		•		•	•			:	•				0.00
21	*	•	,		•	•			:		•		•		•	:	•		•			.6	.1 (	0.00
23	*		,		•	•			•		•		•		•	•			•	•		. 3		0.00
24 25	*	•	•		•	•			•		•		•		•	•	,		:	•	,	.3	.1	0.00
26	*		,		•				· .				•			, ini .	, , , , , , ,		•	•	,	.2	.1	0.00
27	*		,		•	•			•		•		•		•	•	•		•	•		.2	.1	.09
28 29	*	•	•		•	•			•		•		•			•	,		•	•	,	.1	.1	0.00
30			, • a		•	•			•		•.		•		•	•	•		•	•	•	.1	.1	0.00

2	DEC-JAN 1 *	200.0.	400.0	600.0	800.0	1000.0	120).0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
3		•	•	•	•	•	•	•	•	•	•	.1	.1 .03 1 0.00
1				•	:	•	•	:	•	:	•		
6	4 .	•	•	•			•		·				
7	5 * ** *	•	•		•	•	•	•	•	• '	•		
8	6 *	•		•	•	•	•	•	•	•	•		
9	7 *	•			•	•		•		•	•		.2 0.00
10	9 4	•	•	•	•	•	•	•	•		•		2 0.00
11		•	•	•	•	•	•	•		•	•		.1 0.00
12	11 *					•		•	•	:	:		
13	12 *	•	•		•		•				•		
15		•	•	•	•	•	•	•	•	•	•	.1	.1 .00
16		•	•	•	•	•	•	•	•	•	•		
17 *		•	•	•	•		•	•	●.	•	•		
18		•		•	•	•	•	•	•	•	•		
19		•	•	•	•	•	•		•	•			
20 1		•	•	•	•	•	•	•		•	•		
21			•		•	•		,		•	•		
22	21 *							·					
23 *	22 *	•	• ,	•	•	•		•	•	•	•		.2 0.00
25			. •		•	. •	•	•	•	•	•	.0	.2 0.00
26 *		•	•	•	•	•	•	•	•	•	•		
27		•	•	•	•	•	•	•	•	•	•		.2 0.00
28 *		•	•	•	•	•			•	•	•		.2 .06
29 *		•	•	• ,	•	•	. •		•	•			
30 *		•	•	•	•	•	•	•	•		•		
1		•	•	•	•	•	•	•	•				
1		•	•	•	•	•	•	•	•	•	•		
2 *	-										·		
\$ * * * * * * * * * * * * * * * * * * *	2 *	•	•	•	•	•		•	•	•	•		
5 *	3 *	•	•	•	•	•			•	•	•	. 0	
6 *	4 *	•	•	•	•	•	•	•	•		•		
7 *	5 *	•	. •	•	•		•	•	•		•		0.0 0.00
8 *	6 *	•	• •	•	•	•	•	. •	•	•	•		.1 0.00
9 *		•	•	•	•	•			•	•	•		
10 *	• •	•	•	. •	•	•		•	•	•	•		
11 *	-	•	•	•	•	•		•	•		•		
12 *			•	·	·	* *							
14 *	12 *	•	•	•	•	•	`,	•	•	•	•		
16 *	13 # 5	•	•	•	•	•		•	•	•	•	.0	
16 *		•	•	•	•	•		•	•	•	•		
17 *		•	•	•	•	•	•	•	•	•	•		
18 *		•		•	. •	. •	•	•	•	•	•		
19 *		•	•	. • • • •	•	•		•	•	•	•		
20 *		•	•	:	•	•		. •		:	:		
21 *		·	-			•					•		.4 .05
23 *		•	•		•			•	•	•	•	.1	.4 .03
24 *	22 #	•	•	•	•	•		•	•	•	•		
25 *		•	•	•	•	•		•	•	•	•		
26 *		•	•	•	. •	•	•	•	•	•	•		
27 *		•		•	•	•	•	•	•	•	•		
28 *		•	•	• .	. •	•		•	•	•	•		
29 ±		•	•	•	•	•	•		•		•		
30 *		:	•								•		
			•		•			•	•	•	•	• 0	.4 0.00
			•	, is • Fig.	15 • £50	ana 🔸 adag		4. • 1.50	176 • 1975	and organization	•	. 0	.5 .04

FEB-MAR	200.0	400.0	600.0	800.0	1000.0	:.200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
1 *	•	•	•	•	•	. •	•	. •	•	•	0	4 .00
2 *	•	•	•	•	•	•	•	•	•	•	.1	.6 .06
3 *	•	•	•	•	•	•	•	•	•	•	.0	.6 0.00
··· 4 *	•	•	•	•	•	•	•		•	•	,1	.5 .07
5 <b>≱</b>	•	. •	•	•	•	•	•	•	•	•		.4 .01
6 *	•	•	•	•	•	•	•	•	•	•	.0	4 0.00
7 *	•	•	• •	* •	•	•	•	•	. •	•	.0	6 0.00
8 *	•	•	•	•	•	•	•	•	•	•	. 4	1.0 .62
9 *	•	•	• .	•	•	•	•	•	. •	•	1.8	1.7 0.00
- 10 ◆	•	•	•	•	•	•	•	•	•	•	1.8	.7 0.00
11 *	•	•	•	. •	•	• "	•	•	•	•	1.4	.5 .03
12 *	•	•	. •	•	•	•	•	•	•	•	1.0	.5 0.00
13 *	•	•	•	•	•	•	• •	•	•	•	.8	.5 .00
14 *	. •	•	•	•	•	. •	•	•	•	•	.6	.5 0.00
15 *	•	•	•	•	•	•	•	•	•	•	.5	.5 0.00
16 *	•	•	•	•	•	•	•	•	•	•	.4	.5 0.00
17 *	•	•	•	•	• '	•	•	•	•	•	3	.4 0.00
18 *	•	•	•	•	•	•	•	•	•	•	. 3	.4 0.60
19 *	•	•	•	•	•	•	• • • • • •	•		•	.2	.4 0.00
20 ♥	•	•	•	•	•	•	•	•	•	•	. 2	.4 0.00
21 *	•	•	•	•	•	•	• .	•			. 2	.5 0.00
22 *	•	•	•	•	•	•	•	<u>.</u>			.1	.5 0.00
23 *	•	•	•	•	•	•		•			. 1	.5 0.00
24 *	•	•	•	•	•	•	• .	•			1	.5 0.00
25 *	•	•	•		•	•	•	•			,1	.6 0.00
26 *	•	•	•	•	•	•	•	•	•		3	.7 .58
27 *	•	•	• .	•	. •	•	•	•		•	1.2	1.4 .01
28 *	•	•	•	•	•	•	•				1,1	.7 .00
1 *	•	•	•	•	•	•	•	•			. 8	.5 0.00
2 *	•	•	•	•	•	•	•				. 6	.3 0.00
3 *	•	•	•	•		•	•		•		5	.3 .11
4 *	•	•	•	•	•	•	•				. 7	.9 .20
5 *	•	•	•	. •	•	•	•		·		. 3	1.0 0.00
6 *	•	•	•	•	•	•	100	_		·	. 2	.9 0.00
7 *	•	•	•	•	•	•					. 2	.6 0.00
8 *	•	•	. •	•	•	•					. 2	.5 0.00
9 *	•	•	• .	•	•		•				. 2	.4 0.00
10 *	•	•	•	•	•						.1	.4 0.00
11 *	• .	•	•	•	•	•			•	•	.1	.4 0.00
12 *	•	•	•	•	•		* .		•	•	. 1	.4 0.00
14 *	•	•	•	•		·	·		•	•	.1	.4 0.00
15 *	•	•		•				•	•	•	.1	.2 0.00
16 *	•	•		·	·		•	•	•	•	,1	.3 0.00
17 *	•					•		•	•	•	. 1	.5 0.00
18 *						•		•	•	•	. 1	.5 0.00
19 ★	•					•	•	* .	•	•	.1	.5 0.00
20 *	•		•		•	•	•	•	•	•	2.3	3.8 1.07
21 *	•		-	•	•	•	• * *	•	•	•	6.1	6.2 .02
55 *		•		•	•	•	•	• •	•	•	4.3	1.4 0.00
23 *	•	:		•	•	•	•	•	•	•	3.2	.9 0.00
24 *				•	•	•	•	•	•	•	2.5	.8 0.00
25 *0	-		•	•	•	•	•	•	•	•	3.0	22.0 .56
26 ≠0				•	•	•	•	*	•	•	2.8	11.0 0.00
27 *		•		•	•	•	11 · 11 · 11 · 11 · 11 · 11 · 11 · 11	• •	•	•	2.1	1.5 0.00
28 *		•	•	•	•	•	•	•	•	•	1.7	1.0 .03
29 *		•	. •	•	•			•	•	•	1.3	.9 .03
30 *	•	•	•	•	•	•	•	•	•	•	1,1	1.0 .04
31 *0		•	•	•	•	. •	•	•	•	•	. 9	12.0 .06

AUG-SEP	200.0	400.0	600.0	800.0	1000.0	120(.0	1400.0	1600.0	1800.0	2000.0	SIM.		RAIL+ME	ELT
2 *	•	•	•	•	•	•	•	•	•	•	7.0	7.0		
3 *		•	•	•	•	•	•	•	•	•	6.0 5.2	6.0		
4 *			•	•	•	•	•	•	•	•		5.1		
5 +	•			•	•	•	•	•	•	•	4.6	4.7		
6. *	•	ŏ		•	•	•	•	•	•	•	4.2 84.9	3.8 400.0		
7.	•	* . 0			•	•	•	•	•	•	363.0	478.0		
8 .0	•	* .			•	•	• ,	•	•	•	361.3	11.0		
90 *	•	•		•		-	•	•	•	•	32.8	8.1	0.00	
10 0=	•	•			·	<u>.</u>	•	•	•	•	11.9	6.5		
11 *	•						•	<u>.</u>	•	•	8.8	5.1	0.00	
12 *	•	• 1	•			Ţ		•	•	•	7.3	4.2		
13 *	•	•	•	•	•	•			·	·	6.1	3.8	0.00	
14 *	•	•	•	•	•	•			•	·	5.3	3.8	0.00	
15 *	•	• '	• •	•	• 1	•	•	•	•		4.7	3.5		
16 *	•	•	•	•	•	•		•	•	•	4.2	3.5	0.00	
17 *	•	•	•	•	•	• '	•	•		•	3.9	3.2		
18 *	•	•	•	• 1	•	•	•	•		•	3.8	2.9	.33	
19 *	•	• "	•	• *	•	•	• *	•	•	•	3.5	2.9	0.00	
20 *	•	•	•	• 1	•	•	•	•	•	•	3.2	2.5	0.00	
21 *	•	•	•	• 1	•	•	•	•	• 3	•	3.1	2.3	0.00	
22 *	•	•	•	•	•	• 1	•	•	•	•	3.0	2.1	0.00	
23 *	•	•	•	•	•	•	•	• "	•	•	2.9	1.8	0.00	
24 *	•	•	•	•	•	•	♦ 15		•	•	2.8	1.8	0.00	
25 *	• 1	• '	. •	•	• '	•	•	•	•	•	2.8	1.7	0.00	
26 *	•	•	• "	•	•	•	•	•*	•	•	2.7	1.7	0.00	
27 *	•	•	•	•	•	•	• "	• *	•	•	2.7	1.5	.08	
28 *	•	•	•	•	• "	•	•	•	•	• "	2.7	1.5	.13	
29 *	•	•	•	•	•	•	•	•	•	•	2.6	1.5	0.00	
30 *	• "	•	•	•	•	•	•	•	•	•	2.5	1.4	0.00	
31 *	•	•	•	• 1	•	• "	•	•	•	•	2.5	1.4	0.00	
1 0* 2 0 *	•	•	•	•	• "	•	•	•	•	•	14.0	2.1	.81	
30 *	•	•	•	•	•	•	•	•	•	• .	39.9	4.5	0.00	
4 0*	•	• ,	•	•	•	•	• ,	•	•	•	49.6	2.5	. 54	
5 4	•	•	•	•	•	•	•	•	•	•	13.9	1.8	0.00	
4 .	•	•	•	•	•	•	•	•	•	•	6.2	1.4	0.00	
7 *	•	•	•	•	•	•	•	•	•	•	5.1	1.3	0.00	
A =	•	•	•	• ,	•	•	•	• .	•	• "	4.3	1.0	0.00	
9 *	•	•	•	•.	•	•	• ,	•	•	•	3.8	. 9	0.00	
10 *	•	•	•	•	•	•	•	•	•	• .	4.4	3.4	.52	
11 *	•		•	•	•	•	•	•	•	•	5.9	3.9	0.00	
12 *			•	•	•	•	•	• .	•	•	3.2	1.0	0.00	
13 *					•		•	•	•	•	2.9	.8	0.00	
14 *	•	•	•	•	·		:	•	•	•	2.5	.8	0.00	
15 *	•	•	•		·		·	•		•	2.4	1.0	0.00	
16 *	•	•	•	•	•	•		:	•	•	2.3	1.0	0.00	
17 *	•	•	•	•	•	•	•	•	•		2.2	. 8	.00	
18 *	•	•	•	•		•	•				2.2	. 8	0.00	
.19 *	•	• '	•	• 1	•	•	•	•	•	•	2.1	1.0	0.00	
20 *	•	•	•	•	•	•	• *	•	•	•	2.1	1.3	0.00	
21 *	•	•	•	•	•	•	•	•	·•	•	2.0	1.3	0.00	
22 *	•	•	•	•	•	•	•	•	•	•	2.0		0.00	
23 . *	0.	• •	• •	•	•	. •	•	•	•	•	99.5	174.0	2.59	
24 .	•	•	• *	• •	•	•	0 .	•	•	•	848.0	1340.0	3.01	
25 .	• •	•	.•	•	• *	•	•0	•	•	•	1027.8	1430.0	.94	
26 +0 *	•	•	• •	•	•	•	•	•	•	•	108.0	30.0	0.00	
27 .*	•	•	•	•	•	•	•	•	•	•	29.2	12.0	0.00	
28 0* 29 0*	•	•	•	•	•	•	•	•	•	•	19.4	8.1	0.00	
30 .	•	• •	•	• **	•	^ A + • • • • • • • • • • • • • • • • • •	•	•	•	* •	15.0	6.5	.10	
JU .	•	0 • •	. •	•	•	4.5	•	•	•	• 1	435.6	365.0	1.33	

	FLOW PLOT		CIL CR		WATER YEAR		*=SIMULATED		ERVED	UNITS-CFSD		000 015414551#
OCT-NOV	200.0	400.0	600.0	800.0	1000.0	12(0.0	1400.0	1600.0	1800.0	2000.0	SI4. 399.0	OBS. RAIN+NELT 143.0 1.26
	0 •	*	•	•	•	•	•	•	•	*		11000.0 7.83
3.	•	٥.	•	•	*	:	•	:		•	1008.9	370.0 1.09
4	:	•	•		. *	Č.				•	1031.2	
5.	0 *.		•		•	•			•	•	188.5	140.0 .00
6.*	•	•	•	•	•			•		•	37.0	38.0 .00
. 1.7 .*	•	•	•	•	•	•	•	•	. •	•	18.0	24.0 .21
8 .*	•	•	. •	•	•	•	•	•	. •	•	13.0	17.0 .06 15.0 0.00
9 .*	•	•	•	•	•	•	, •	•	•	•	8.6	13.0 0.00
10 *0 11 *0	•	•	•	•		•	</td <td>•</td> <td></td> <td>•</td> <td>7.4</td> <td>11.0 .02</td>	•		•	7.4	11.0 .02
12 *0	•		. •			•				•	6.5	11.0 0.00
13 .	<b>*</b> 0.		•		•	•	•	•	•	•	133.2	176.0 .64
14 .*	•	•	•	•	•		•	. •	•	•	27.4	24.0 0.00
15 *0	•	•	•	, •	, •	•	•	•	•	•	8.1	11.0 0.00
16 *	•	•	•	•	•	•	•	,•	, •	•	5.6 4.9	9.3 0.00 8.1 0.00
17 *	•	•	•	•	•	•			•	•	4.6	7.6 0.00
18 * 19 *	•	•	•	•	• •	•				·	4.3	7.0 0.00
20 *	•	•	:	·			•	•		•	4.1	6.5 0.00
21 *	·	•	•	•		•	•	•	•		3.9	6.0 0.00
22 *		•	•	. •	•	•	•	•	•	•	3.8	6.0 0.00
23 *	•	•	•	•	•	•	•	•	•	•	3.7	5.6 0.00
24 *	•	•	•	•	•	•	•	•	•	•	3.6 3.5	5.1 0.00 5.1 0.00
25 *	•	•	•	•	•	•	•	•	•	•	3.4	6.0 0.00
25 * 27 *	•	•	•	•	•	•	<u>.</u>	•		.*	3.4	5.6 0.00
28 *	•	•		:				·	•	•	3.3	5.1 0.00
29 ≉	•	·		•	•	•	•	•	•	•	3.2	5.1 0.00
30 0*	•	•	•	•	•	•	•	. •	•	•	25.6	9.3 .58
31 *		•	•	•	•	•	•	•	•	•	9.0	8.1 0.00
1 *	•		•	•	•	•	•	•	•		3.8 3.3	6.5 0.00 6.0 0.00
2 *	•	•	•	•	,•	•	* , <b>*</b>	ing.	•	•	27.3	8.7 .43
3 0≠ 4 0≠	•	•	•	•	•	•	.•	:	:		20.0	9.3 0.00
5 *	•	•	•	•	, •	•	* ·		•	•	4.7	5.6 0.00
6 *				•			•		•	•	3.5	5.1 0.00
~ 7 *	•	•	•	•	•	•	•	•	•	•	3.2	4.7 0.00
° 8 <b>*</b>	•	•	•	• "	•	•	. •	•	•	•	3.1	5.1 0.00
9 *	•	•	•	•	•	•	.•	•	•	•	3.0 2.9	5.1 0.00 5.1 0.00
10 *	•	•	•	•	•	•		•	•	•	2.8	5.1 0.00
11 * 12 *	•	•	•	•	•	•	•	•	•	:	2.7	5.1 0.00
13 *	•	•	•	•					•	•	2.7	5.1 0.00
14 *	•	•	•	•	•	•	•	•	•	•	2.6	4.7 0.00
15 *	•	•	•	•	•	•	•	•	•	•	2.6	4.7 0.00
16 *	•	•	•	•	•	•	•		•	•	2.5	5.1 0.00 4.7 0.00
17 *	•	. •	•	•	.•	•		•	•	•	2.5 2.4	4.7 0.00 4.7 0.00
18 *	.•	•	.*	•	•	•		•	•	•	2.4	4.2 6.00
19 * 20 *	•	•	•	•	•				•	•	2.3	3.8 0.00
21 *	•		•	•	•	•	Ţ.	•	•	•	2.3	3.5 0.00
22 *	. •	•	•	•	•	• 1	•	•	•	•	2,3	3.2 0.00
23 *	•	•	•	•	•	•	•	•	•	•	2.2	3.2 0.00
24 *	•	•	•	•	•	•	•	•	•	•	2.2	
25 *	•	•	•	. •		•	•	•	•	•	2.2 2.1	2.9 0.00 2.9 .01
26 *	•		•			•	•	•	•	•	2.1	2.7 0.00
27 *		•	•	•		. •	•	•	•		2.1	2.7 0.00
28 * 29 *					· · · · ·						2.0	
30 *	•	•	•		•	•	•		•	•	2.0	3.2 0.00

DEC-JAN 1 *	200.0	400.0	600.0	800.0	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
2 *		•	:	•	•	• .	•	•	•	•	2.0	3.5 0.00
3 *				• • •	•	•	•	•	•	•	1.9	3.2 0.00
4 *					•	•	•	•	•	•	1.9	3.2 0.00
5 *	•	•	•				•	•	•	•	1.9 1.8	3.8 0.00 3.5 0.00
6 *	•	•	•	•				•	•	•	1.8	3.5 0.00
7 *	•	•	•		•	•			·	•	1.8	3.5 0.00
8 *	•	•	•	•	•	• -		•	•		1.8	3.5 0.00
9 *	•	•	•	•	•	•	•	•	•		1.7	3.2 C.00
10 *	•	•	•	•	•	•	•	•	•	•	1.8	3.5 .13
11 * 12 *	• ,	•	•	• .	•	•	•	•	•	•	1.7	4.2 0.00
13 *	•	•	• .	•	•	•	•	•	•	•	1.7	3.8 0.00
14 *	•	•	•	•	•	•	• :	•	•	•	1.6	3.2 0.00
15 *	•	•	•	•	•	•	•	•	•	•	1.6	3.2 0.00
16 *	•	•	•	•	•	•	•	•	•	•	1.6	3.2 .01
17 .	0 *.	•	•	•	•	•	•	•	•	•	1.9	3.8 .41
18 . 0*	•		•	•	•	•	•	•	•	•	178.0	137.0 1.20
19 *0	•	•			•	•	•	• •	•	•	77.3	52.0 0.00
20 *	•	•			·		•	•	•	•	9.6 6.5	11.0 0.00 8.1 0.00
21 *	•	•	•		•		•	•	•	•	5.2	6.5 0.00
22 *		•	•	•	•	•		•		•	4.3	6.5 .11
23 *	• .	•	•	•	•	•		•			3.7	7.6 .03
24 *	•	•	•	•	•	•	•	•	•	·	3.1	6.5 0.00
25 *	•	•	•	•	•	•	•	•	•		2.7	6.0 0.00
26 *	•	•	•	•	•	•	•	• ~	•	•	2.5	6.5 .24
27 * 28 *	•	•	•	•	• -	•	•	•	•	•	2.4	9.3 .00
29 *	•	•	•	•	• •	•	•	•	•	•	2.1	6.0 0.00
30 *	•	•	•	•	•	•	•	•	•	•	2.0	4.7 0.00
31 *	•	•	•	•	•	• .	•	•	•	•	1.9	4.2 0.00
1 *	•	•	•	•	•	•	•	•	•	•	1.8	4.2 .00
2 *			•	• ,	•	•	•	•	•	•	1.7	4.2 0.00
3 *				•	•	•	•	•	•	•	1.7	4.2 0.00
4 *		•		· ·	•	•	•	•	•	•	1.6	3.8 0.00 3.5 0.00
5 *	•	•	•	•	·			•	•	•	1.7	3.5 0.00 4.2 .13
6 *	•	•	•	•	•		•			•	1.6	4.7 0.00
7 *	•	•	•	•	•	•	•	•	•	·	1.5	5.6 0.00
8 *	•	•	•	•	•.	. •	•	•	•	•	1.5	5.6 0.00
9 *	•	•	•	•	•	•	•	• .	•	•	1.5	5.1 0.00
10 *	•	•	•	•	•	•	•	•	• .	•	1.4	5.6 0.00
11 *	•	•	•	•	•	•	•	•	•	•	1.4	5.1 0.00
12 * 13 *	•	•	•	•	•	•	•	•	•	•	1.6	6.5 .25
14 .0 *	•	•	• -	•	• •	•	•	• .	•	•	1.4	6.0 0.00
1.5 0*	•	•	•	•	•	•	•	•	•	•	63.3	11.0 .34
16 *			•	•	• .	•	•	•	•	•	10.7	7.0 0.00
17 0 *	•		•	•	•	•	•	•	•	•	5.7	4.2 .38
18 *	•	•		•	•	•	•	•	•	• :	40.8 5.8	5.6 .13 6.5 0.00
19 *	•	•	•	•			:	•	-	•	3.2	6.5 0.00 3.2 0.00
20 *	•	•	•	•	•	•	÷	:	•	•	2.7	2.9 0.00
21 *	•	•	•	•	•	•	•	•	•		2.3	3.2 0.00
22 *	•	•	•	•	•	•	•	•	•	•	2.1	3.2 0.00
23 *	•	• .	•	•	•	•	•	•	•	•	1.9	3.2 0.00
24 ¥	•	. •	•	•	•	•	•	•	•	•	1.7	3 0.00
25 *	•	•	•	• .	•	•	• .	•	•	•	1.6	4.2 0.00
26 *	•	•	•	•	•	•,	• 1	•	•	•	1.5	5.6 0.00
27 * 23 ±	•	• :	•	•	•	•	•	•	•	•	1.4	6.0 0.00
29 ×	•	•	•	• .	,•	. •	•	•	. •	•	1.4	4.7 0.0C
30 ×		e 🖠 isan		: • • • • • • • • • • • • • • • • • • •	•	gi 🕴 e pris	•	•	• 25	. •	1.3	4.2 0.00
31 *	•	•	•	•	•	•	•	•	•	•	1.3	4.2 0.00
	-	-	-		•	•	•	•	•	•	1.3	4.7 .03

	-MAR	200.0	40	0.0	601.0	800.0	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
2		• ,	1	•	•	•	•	. •	•	•	•	•	1.2	4.7 0.00
	0 *	•		•	•	•	•	•	•				37.0	7.5 .75
- 4		. *	0	-	•	•	•	•					243.0	254.0 .43
5			•		•		•	•					21.5	29.0 0.00
ે કે <sup>'</sup>					•	. •	•	•	•	•	•		5.9	12.0. 0.00
7	4			•			•	•	•	•		•	4.4	9.3 0.30
8	*	•		•		•	•	•	•		•		3.6	8.7 0.00
9	¥	•		•		•	•	•	•	•	•	•	3.0	9.3 0.00
10	*	•		•	•	•	•	•	•	•	•	•	2.6	7.6 0.00
11		•		•		•	•	•	•		•	•	2.2	5.6 0.00
12		•		•	•	•	•		•	•	•	•	2.0	5.1 0.00
13		•		•	. •	•	•	•	•	•	•	•	1.6	5.6 5.35
14		•		•	•	•	•	•	•	. •	•	•	1.7 7.7	5.6 (0.00 6.5 .28
15		•		•	•	•	•	•	•	•	•	•	2.7	ä.1 5.55
16		•		•	•	•	•	•	•	•	•	•	1.6	9.3 0.00
13		•		•	•	•	•	,	•		•	•	1.4	6.5 0.13
19		•		•	•	•	•		•		•	. •	1.4	6.0 0.00
20		•		•	•	•	•		•	•	•	•	1.+	6.0 .09
21										-			1.3	7.0 0.00
22						•					·		1.2	6.0 0.00
.33											•		1.3	6.3 .12
24	#										•	•	1,2	4.7 0.30
25	4					•			•	•	•	•	1.1	42
26	•	· ·		-		•			•		•	. •	1.1	4.7 0.00
`≥ <del>`</del>	<b>U</b> *			•	-	•	•			•	•	•	37.1	4.7
28	0 *	•		•	•	•	•	, •	•	•	•	•	30.2	5.6 .01
29		•		•	•	. •	•	. •	•		•	•	3.4	5.6 .00
1		•		•	•	•	•	•	•	•	•	•	2.2	5.6 .10
2		•		•	•	•	•	•	•	•	•	•	50.2	6.0 .19
	0*	•		•	•	•	. •	. •	•	•	•	•	11.0	6.5 0.00 6.0 0.00
4		•		•	٠	, •	. •	•	* , •	•	•	•	2.8	6.0 0.00 5.6 0.00
5		•		• ,	•	. •	. •	•	•	•	•	•	1.9	5.6 0.00
6 7		•		•	•	•	•	•	• .	•	•	•	1.6	6.5 0.00
	*0	•		•	•	•	•	•	•	•	•	•	1.5	14.0 .04
9		0		•	•	•	•	•	•	•			1.4	121.0 0.00
10		•		•	•		•						1.3	54.0 .01
11		•		•	•			•					1.2	20.0 0.00
12				•				•		•	•		1.1	12.0 0.00
13	#			•		•		•		•	•	•	1.1	10.0 0.00
14	*			•	•	•	•	•	•	•	•	•	1.1	10.0 .11
15		•		•	•		•	•		•	•	•	1.1	27.0 .14
16		•		•	•	•	. •	. •	•	•	•	. •	1.0	29.0 0.00
17		•		•		•	•	. •		•	• ,	•	1.0	11.0 0.00
18		•		•	•	•	•	•	•	•	•		.9	10.0 0.00
19		•		•	•	. •	•	•		•	•	•	9	8.7 0.00 7.6 0.00
20		•		•	•	•	•	•	. •	•	•	•	.9	7.0 0.00
21		•		•	•	•	•	•	•	•	•	•	.9	7.0 0.00
23		•		•	•	•	•	•	•	•	:	•	. 8	6.0 0.00
24		•			-		•	•	•		•	•	.8	6.0 .00
25				•				•	•	•	•		.8	6.0 0.00
26							•		•		•	•	. 8	6.0 0.00
27				•			•	•	•	•	•		. 8	6.0 0.00
28		•		•	•	•	•	. •	•	. •	•	•	. 8	6.0 0.00
29	M			•		. •	•	•		•	•	•	8	5.6 .15
30		•		•		•	•	•			•	•	.8	5.6 0.00
31	專			• 300		· · · · ·	•	•	100	grading •	•	Granes 💌 🗀	. 8	5.1 .25

APR-MAY	200.0	400.0	600.0	800.0	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
1 *	•	•	•	•	•	• .	. •	•	•	•	. 8	5.1 0.00
2 *	•	•	•	•	• '	•	•	•	•	•	• 6	4.2 0.60
3 *	•	•	•	•	•	•	•	•	•	•	• 6	3.8 0.00 3.8 0.00
4 *	•	•	•	•	•	•	•	•	•	•	.6	3.8 0.00 3.8 0.00
5 * 6 *	•	•	•	• ,	•	•	•	•	•	•	.6	4.2 0.00
7 *	•	•	•	•	•	•	•	•	:	•	.6	4.2 0.00
e *			•	:			•	•	•	•	. 6	4.7 .12
9 *	•	•	•	•	•	•	•	•	•	•	• 5	5.1 0.00
10 *	•	•	•	•	•	•	•	•	•	•	. 5	4.7 0.00
11 *	•	•	•	•	•	•	• 1	•	•	•	• 5	4.7 0.00
12 *	•	• 1	•	•	•	•	•	• *	•	•	• 5	5.1 0.00
13 *	•	•	•	•	•	•	•	•	•	•	.8 32.2	6.7 .46 16.0 .42
14 .0*	• .	•	• ,	•	•	•	•,	•	•	•	6.3	7.0 .30
15 * 16 *	• :	• ,	•	•	•	•	•	•	:	•	3.3	162.0 .15
17 *0	•	•	•	:	•	·	•		•	•	1.9	18.0 0.00
18 *	•	•			·	•	•	•	•	•	1.5	8.7 0.00
19 *	•	•	•	•	•	•	•	•	•	•	1.2	7.6 0.00
20 *	•	•	•	•	•	•	•	•	•	•	1.0	7.0 0.00
21 *	•	•	•	•	•	•	•	•	•	•	.9	7.0 0.00
22 *	•	•	•	•	• ,	•	•	•	• ,	•	.8	6.5 0.00
23 *	•	•	•	•	•	•	•	• .	•	•	.6	6.0 0.00 5.6 0.00
24 * 25 *	•	•	•	•	•	•	•	. •	•	•	.6	5.1 0.00
26 *	•	•	•	•	:		•			·	.6	5.1 0.00
27 *	•		•	•		•	•	•	•	•	.7	4.7 .25
28 *	•	•	•	•	•	•	•	•	•	•	. 7	5.6 .23
29 ×	•	•	•	•	• "	•	•	•	•	• ,	5.5	6.5 .38
30 *	•	•	•	.•	•	•	•	•	•	•	2.8	6.5 0.00
1 *	•	•	•	•	• ,	•	.•	•	•	•	1.3	5.6 0.00 5.1 0.00
2 *	•	•	•	•	•	•	. •	•	•,	•	2.1	5.1 .47
4 0*	•	•	•	•	•	•	•	•	•		13.3	6.1 .47
5		:	·	·	. 0		•		•	•	88.5	1060.0 1.13
6 .	*	0.	•	•	•	•	•	•	•	•	111.1	376.0 .06
7 .*	•	•	•	•	•	•	•	•	•	•	11.9	27.0 0.00
8 *0	•	• '	•	•	•	•	•	•	•	•	7.5	18.0 0.00
9 *0	•	•	•	•	•	• ,	•	•	•	•	5.8 4.5	14.0 0.00 11.0 0.00
10 *0 11 *	• .	•	•	•	•	•	•	•	•	•	3.6	9.3 0.00
12 *	•	•	•	•	•		•			·	2.9	8.1 0.00
13 *	•		·				•	•	•	•	2.4	7.6 0.00
14 *	•	•	•	•	• '	•	•	•	•	•	2.1	7.6 0.00
15 *	•	•	•	•	•	•	. •	•	•	•	1.8	7.6 0.00
16 *	•	•	• 1	•	•	• 1	• .	•	•	•	1.6 6.4	7.0 .05 6.0 .64
17 *	•	•	•	•	•	•	•	•	•	•	111.5	6.0 .64 29.0 1.24
18 .0 19 . 0	<i>*</i> •	•	•	• .	•	•	•	•	•		139.6	37.0 .40
20	* .	•	•	•	•		·	·		•	154.4	152.0 .38
21 .*	•	•		:	•	•		•		•	18.3	15.0 0.00
22 *	•	•	•	•	•	•	•	•	•	•	9.3	8.7 0.00
23 *	•	•	•	•	•	•	•	•	•	•	7.2	7.0 0.00
24 *	• .	•	•	•	• .	•	•	•	•	•	5.7	6.0 .17
25 •*	•	•	•	•	• .	•	•.	•	•	•	10.3 4.3	18.0 .31 6.5 0.00
26 *	• ,	•	•	•	•	. •	•	•	•	•	10.1	5.6 .50
27 0* 28 0 *	•	•	•	•	•	•	•				89.6	9.3 1.04
29 .	0.*	•	•	•	•	•	•	•	•	•	212.2	179.0 .07
30 .*						•			•	\	16.3	12.0 0.00
31 *	•	•	ė	•	•	•	•	•	•	•	7.6	8.1 .02

JUN-JUL 1 *0	200.0	400.0	600.0	0.008	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MELT
2 \$	•	•	•	•		•	٠	0	•	•	6.2 4.9	11.0 .23 7.6 .03
3 *		•	•	. •	•	•	•	•	•	•	4.1	6.5 0.00
4 0		•	•	•		•	•	•	•	•	3.5	5.6 0.00
5 ¥			•		7	,		•	•	•	3.0	4.7 .05
6 4	٠	•	•	•				•	•	•	3.0	5.1 .44
7 *0	•	•		•				•	•	•	2.6	20.0 .14
8 *	•	•	•	•		•		•	•		2.3	8.1 .01
9 *	. •	•	•	•	•	•	•	•	•	•	2.1	5.1 .01
10 *	•	•		•	•	• "	•	•	•	•	2.0	3.8 0.00
11 *	•	•	•	• ,	•	•	•	•	•	•	1.9	3.2 .04
12 * 13 *	•	. •	•	•	•	•	•	•	•	• • • • • • • • • • • • • • • • • • •	1.8 1.9	2.7 .03
14 *	•	•	•	•	•	•	•	•	•	•	1.7	2.7 0.00
15 *	•	•		•	•		•	•	•	•	1.6	2.7 0.00
15 *	•	•		•	- 1		•	•	•	•	1.6	2.3 .07
17 *		•	•	•		•	•	•		•	1.6	2.0 0.00
18 *	•	•	•	•	•	٠.	•	•	é	•	1.5	1.8 0.00
19 *	• .	•	•	•	•	•	•	•	•	•	1.5	1.7 0.00
20 *	•	•	•	•	•	•	•	•	•	•	1.7	1.7 .37
21 *	•	•	•	•	•	•	•	•	•	• 1	1.5	2.1 0.00
22 *	•	•	•	•	•	•	•	•	, •	•	1.4	1.8 0.00
23 *	•		. •	•	•	•	•	•	•	•	1.4	1.7 0.00
24 #	•	•	•	•	•	,	•	•	•	•	1.5	1.4 .19 1.4 .01
25 * 26 *	•	•	•	•	,•		•	•	•	•	1.4	1.4 .01
27 *	•	• .	•	•	•	•	•	•	•	•	1.3	1.4 .00
28 #	•	•	•	•	•		•	•	•	•	1.3	1.4 0.00
29 *	•	•				,	:	•	•	•	1.3	1.0 0.00
30 ≉		•	•			,	· ·	·	·	•	1.2	.9 0.00
1 *	•	•		•	•				•	•	1.2	.8 0.00
2 *		•	•	• *	•	,		•	•	•	1.2	.7 0.00
3 *	•	• .	•	•		•	•	•	•	•	2.1	.6 .59
4 .	0 .	•	. *	•		•	•	•	•	•	654.9	102.0 2.79
50 *	•	•	•	•	•		•	•	•	•	53.1	3.8 0.00
6 0*	•	. •	•	•	. •	•	•		•	•	15.9	2.1 .09
7 0*	. •	•	, •	•	•	•	•	•	•	•	11.8	1.8 0.00
8 *	•	• .	•	•	•	•	•	•	•	•	9.2	1.7 .00 1.5 0.00
`:9 <b>*</b> `10 *	•	•	•	•	. •	,	•	•	•	•	7.3 5.9	1.5 0.00 1.3 .07
11 *	•	•	•	•	•	•	•,	•	•	•	4.9	1.0 0.00
12 #		•			•		•				4.1	.8 .01
13 *		·	•				•	•	•	•	3.5	.8 .01
14 #	•	•	•	•	•		•	•	•		3.1	.8 .00
15 ≉	•	•	•	• .	•		•	•	•	•	2.8	.8 0.00
16 *	•	• ,	.•	9	•	. •	•	•	•	•	2.6	.7 0.00
170		. •		. •		3	•	•	•		85.1	.5 1.56
18 0	ф .	•	•	6	•	•	•	•	•	•	121.4	.7 0.00
19 0#	•	. •	•	•	•	. •	•	•	•	•	12.3 8.1	.6 0.00 .4 0.00
20 #	•	7 • • • • • • • • • • • • • • • • • • •	•	•		•	•	•	•	•	6.5	.4 0.00 .2 .08
22 0	e . ukr	•	•	•	•	•	•	•	•	•	219.6	1.1 1.54
23 0 #	• •	•	•	•	•	. ,	•	•	4		64.3	2.0 .08
24 0*	•		•	•		,	·	• .	·		12.8	1.4 .00
25 #	•	٠,	•				•	•	•		8.7	1.0 0.00
26 *	•	•		•			9	0	•	•	7.0	.6 0.00
27 * 0		•	•	•	•	•	•	•	•		6.1	50.0 .42
28 *	•	•		•		•	•		•	•	4.9	2.1 .08
29 *	0.	•	•		•	•	•	•	•		4.4	163.0 .36
30 #	o .	• •	•	•	1.5	•	•	•	1 Tan e	•	3.8	105.0 0.00
31 *	. •	6	•	•	•		•	•	•	•	3.3	3.2 0.00

	UG-SEP	200.0	400.0	600.0	800.0	1000.0	1200,0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIH+M	
	2 *	•	•	•	•	•	•	. •	•	•	•	3.0	1.7 0.00	
	3 #	<u>.</u>	•	•	•	.•	.•	•	•	•	•	2.8	1.3 0.00	
	4 *		•	•	•	•	•	-•	•	•	•	2.6	1.0 0.00	
	5 *			:	•	•	١ •	•	•	•		2.5	.7 0.00	
	6 *	•	•	•	•	•	•	•	•	•	•	2.4	.4 0.00	
	7 *		·	•		•	•	•	•	•	•	2.3	.2 0.00	
	8 *	•				•	•	•	•	• •	•	2.2	.1 0.00	
	9 *	•		•			•	•	•	•	•	2.1	.1 .02	
1	.0 ★		•	•				•	•		•	2.1	.1 .01	
1	1 *	•		•			·	•	•		•	2.0	0.0 0.00	
	.2 *	•	•	•	•	•					•	2.0	0.0 0.00	
1	.3 *	•	•	•	•	•	•		•			1.9	0.0 0.00	
1	.4 *	•	•	•	•	•				·	•	1.9	0.0 0.00	
	.5 *	•	•	• .	•		•		•	·		1.9	0.0 0.00	
	.6 ☀	•	•	•	•	•	•				·	1.8	0.0 0.00	
	.7 *	•	•	•	•	•	•	•	•		•	4.1	0.0 .63	
	.8 0 *	•	•	•	•	•	•	•	•	•	•	44.2	0.0 .32	
	9 *	•	•	•	•	•	•	•	•	•	•	6.9	.1 0.00	
	0 *	•	•	•	•	•	•	•	•	•	•	4.6	.1 .00	
	1 *	•	•	•	•	•	•	•	•	•	•	3.8	0.0 .01	
	2 *	•	•	•	•	•	•	•	•	•		3.3	0.0 0.00	
	3 *	•	•	•	•	•	•	•	•	•	•	2.9	0.0 0.00	
	4 0*	•	•	•	•	•	•	•	•	•	•	18.6	0.0 .77	
	5 0*	• .	•	•	•	•	•	•	•	•	•	10.2	0.0 0.00	
	6 · 0 7 0*		•	•	•	•	•	•	•	•	•	246.3	55.0 1.64	
	8 0#	•	•	•	•	•	•	•	•	•	•	28.9	2.1 0.00	
	9 *	•	•	•	•	•.	•	•	•	•	•	11.9	.6 0.00	
	0 *	•	•	•	•	•	•	•	•	•	•	9.2	.2 0.00	
	1 *	•	•	•	•	•	•	•	•	•	•	7.3	.1 0.00	
	1 *	•	•	•	•	•	•	•	•	•	•	6.0	0.0 0.00	
	2 *	•	•	•	•	•	•	•	•	•	•	5.0	0.0 0.00	
	3 *	·	•	•	•	•	•	•	•	•	•	4,2	0.0 0.00	
	4 *	•	•	•	•	•	•	•	•	•	•	3.7	0.0 0.00	
	5 *	•	·	•		•	:	•	•	•	•	3.3	0.0 0.00	
15	6 *	•	•	•	-			•	•	•	•	2.9 2.7	0.0 0.00	
	7 *	•	•	•		·	·	·	•	•	•	2.5	0.0 0.00	
	8 *		•		•	•		·	•		•	2.4	0.0 0.00	
	9 *	•	•	•	•	•	•		•	•		2.3	0.0 .03	
1		•	•	•	•	•	•		•	·		2.2	0.0 0.00	
1		•	• *	•	. •	•	•	•	•	•	•	2.1	0.0 0.00	
1		•	•	•	•	•	•	•	•	•	•	2.1	0.0 0.00	
1		•	•	•	•	•	•	•	• .	•	•	2.0	0.0 0.00	
1		•.	•	•	•	•	•	•	•	•	•	2.0	0.0 0.00	
1		•.	. •	•	•	•	•	•	•	•	•	1.9	0.0 0.00	
1		•	•	•	•	•	•	. •	•	•	•	1.9	0.0 0.00	
1		•,	•	•	•	•	•	•	•	•	•	1.8	0.0 0.00	
1		•	. •	•	•	•	•	•	•	•	•	1.8	0.0 0.00	
2		•	•	•	•	•	•	•	•	•	•	1.8	0.0 .00	
2		•	•	•	•	•	•	•	•	•	•	1.8	0.0 .07	
2			•		٠.	•	•	•	•	•	•	1.8	0.0 .09	
2		•	•	•	•	•	•	•	•	•	•	1.7	0.0 0.00	
24		•	•	•	•	•	·	•	•	•	•	1.8 1.7	.2 .30	
	5 ×	•	•	•	•	•	·	•	•	•	•	1.6	7.9 .03	
26		•	•	•	•.		•	•	•	•	•	1.7	.1 .00 0.0 .13	
	7 *	•	•	•	•	•	•		•	•		1.6	0.0 0.00	
28		•	.•	•	•	•			•	•		1.5	0.0 0.00	
	9 *	•	•	•	•	•		•	•	• • • • • • • • • • • • • • • • • • •	•	1.5	0.0 0.00	
30	0, <b>\$</b> - "- "- "		• 1	•	. • .	•	•	•		•		1.5	0.0 0.00	
											-			

MEAN DAILY					WATER YEAR		*=SIMULATED			UNITS-CFSD			
OCT-NOV	200.0	400.0	600.0	800.0	1000.0	1200,0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+	
2 *	•	,•	•	•	. 0	•	. •	•	•	• '	1.5	0.0 0.0	
3 *	•	. •	•	.•	•	•	•	. •	•	•	1.4	0.0 0.0	
4 *	•	•	•	•	•	•	•	•	•	•	1.4	0.0 0.0	
5 ×	•	•		•	•		•	•	•	•	1.4	0.0 0.0	
6 *		•	•	,•	•	•	•	•	•	•	1.4	0.0 0.0	
7 *	•	•	.•	•	•	•	•	•	•	•	1.4	0.0 0.0	
A #	•	•	•	, •	•	•	•	•	•	•	1.3	0.0 0.0	
9 *		•	•	•	•	•	•	•	. •	•	1.3		
10 *	•		•	•	•	•	•	•	•	•	1.3 1.3	0.0 0.0	
11 *		Š	,	•	•	•	•	•	•	•	1.3	0.0 0.0	
12 *				•	•	•	•		•	•	1.2	0.0 0.0	
13 *		•			•		•		•	•	1.5	0.0 .4	
14 *	•	•					•		•	•	1.3	0.0 0.0	
15 *						·	•	•	•	•	1.2	0.0 0.0	
16 *			•					• •	•	•	1.2	0.0 0.0	
17 *	•		•					•			1.2	3.0	
18 . 0	*	•		. •	•						201.7	83.0 2.5	
19 0 *	•	•	•		•	•				•	52.2	4.3 .0	
20 0*	•	•	•	•	·		•			•	15.2	.6 .0	
21 0*		•	•	•	•						11.3	.3 0.0	
22 *	•	•	•		•		•			·	8.8	.2 0.0	
23 *	•	•	•	•			•	•			7.0	.1 0.0	
24 *	•	•	•	•	•		•	•	•	•	5.6	.1 0.0	
25 *	•	•	•	•	•	. •	•		•	•	4.9	.1 .3	
26 *	•	. •	•	•	•	•	•				4.0	.2 0.0	
27 *	. •	•	•	•	•	•	•		•	•	3.4	.4 .0	
28 *	•	•	•	•	•	•	•	•	•		3.1	.4 .1	
29 .	. *	•	•	•	•	•	•	•	•	•	256.5	252.0 2.2	
30 .0	. *	•	•	•	•	•	•	•	•	•	266.8	27.0 .3	
31 0 *	•	•	•	•	•	•	•	•	•	•	45.5	5.1 0.0	
1 0*	•	•	•	•	•	•	•	•	•	•	14.2	2.5 0.0	
2 0*	•	•	•	•	•	•	•		•	•	10.6	1.5 0.0	
3 *	•	• '	•	•	•		•	•	•	•	8.4	1.5 0.0	10
4 *	•	•	•	•	•	•	•	•*	•	•	6.8	1.8 0.0	
5 * 6 *	•	•	•	•	•	. •	•	•	•	•	5.7	1.5 0.0	
7 *	•	•	. •	•	•	•	•	•	•	•	4.8	1.7 0.0	
8 *	•	•	•	•	•	. •	•	•	• ,	•	4.2	1.5 0.0	
ं9 <b>*</b>	•	•	•.	•	•	•	• ,	•	•	•	3.7	1.7 0.0	
10 *	• .	•	•	•	•	•		•	•	•	3.3	1.7 0.0	
11 *	•	•	•	•	•	•	•	•	•	• .	3.1	1.4 0.0	
12 *	•	•	•	· · ·	•	•	• .	•	•	.•	2.9 2.7	1.5 0.0	
13 *	•		•		•	•	· •	•	•	•	2.6	1.3 0.0	
14 *	•				•		•	•	•	•	2.5	1.0 .0	
15 *	•			•	•	·	•		•	•	2.7	3.0 .3	
16 *	•	•			•		•		•		2.4	4.8 0.0	
17 *	•	•	•	•	•	•	•		•		2.3	1.8 0.0	
18 *	•	•	•	• 4.		•	•	•	•	•	2.2	1.4 0.0	
19 *	•	•	•	•	•		•		•		2.2	1.3 0.0	
20 *	•	•	•	•	•	•		•			2.1	1.1 0.0	
21 #	•	•	•	•	•	•	•	•	•		2.1	1.1 0.0	
55 *	•	•	•	•	• .	•	•	•	•		2.1	1.1 0.0	
23 *	•	•		•	•	0 '		•	0	•	2.0	1.3 0.0	
24 *	•	•	•	•	•	•	•	•	6	•	2.0	1.3 0.0	
25 *	. •	•	•	•	•	•	. • ,	•	•	•	2.0	1.1 0.0	
26 *	•	•	•	•	•	. •	•	•	•	•	1.9	1.1 0.0	
27 *	•	•	•	•	•		•	•			1.9	1.1 .1	
28 #	•	9		•			•	4 1, 1 10 TH			2.0	1.5 0.0	
29 *		•	•		•	•	•	.0	•	•	1.8	1.8 0.0	วัง
30 ≉	• • •	•	• '	. 0	0.19	•	•	. •		•	1.8	1.3 0.0	

DEC-JAN	200.0	400.0	600.0	800.0	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIM+MELT
1 *:	•	•	•	•	•	•		2000.0	2000.0	2000.0	1.8	1.0 0.00
2 *	•	•	•	•	•	•	•	•	•	·	1.8	6 0.00
4 O*	•	•	•	•	•	•	•	•	•	•	1.7	.6 0.03
5 .*	•	•	•	•	•	•	•	•	•	•	18.7	10.0 .56
6 +	•	•	•	•	•	•	•	•	•	•	10.5	15.0 0.00
7 *	•	•	•	•	•	•	•	•	•	•	3.1	1.7 0.00
8 *	•	•	•	•	•	•	•	•	•	•	2.6	1.0 0.00
9 *		•	•	•	•	• •	•	•	•	•	2.4	.8 .01
10 . 0			*	•	•	•	•	•	• .	•	2.2	.7 .04
11 . 0 *	•			•	•	•	•	•	•	•	153.6	98.0 1.02
12 .*	•	•	•		:	•	•	•	•	•	90.3 10.9	59.0 .09
13 *	•	•	•	•		·	•	•	•	•	6.6	18.0 0.00 3.8 .00
14 *	•	•		•	•	•	•			•	5.3	2.9 .05
15 *	•	•,	•	•	•	•	•		·	·	4.4	2.7 0.00
16 *	• ;	•	•	•	•	•	•	•	•	•	3.7	2.0 0.00
17 *	•	•.	•,	•	•	*•.	•	•	•	•	3.2	1.7 0.00
18 * 19 *	•	•	•	•	•	•	•	•	•	•	2.8	1.5 0.00
20 *	•	•	•	•	•	•	* •	•	•	•	2.5	1.4 0.00
21 *	•	•	•	•	•	•	•	•	•	•	2.3	1.3 0.00
22 *	•	•	•	•	•	•	•	•	•	•	2.1	1.1 0.00
23 +	•	•	•	•.	•	•	•	•	•	•	2.0	1.1 .01
24 *		•	•	•	•	•	•	•	•	•	1.9	1.1 0.00
25 *	•		•	•	•	•	•	•	•	•	1.8	1.4 0.00
26 *	•	•	·	•	•	•	•	•	•	•	1.8	1.4 0.00
27 *	•	•	•	•	·	•	•	•	•	•	1.7 1.7	1.4 0.00
28 *	•	•	. •	•	•	•	·	•	•	•	1.7	1.3 .05 1.3 .03
29 *	•	•	•	•	•	•	·			•	1.6	1.4 .01
30 *	•	• -	•	•	•	•	•				1.6	1.4 0.00
31 *	•	•	•	•	•	•	•.	•	•		1.8	1.8 .28
1 *	•	•	•	•	•	•	•	•	•	•	1.5	2.0 0.00
2 *	•	•	•	•	•	•	•	•.	•	•	1.5	1.5 0.00
, <b>3</b> , #	•.	•	•.	•	•	•	•	•	•	•	1.5	1.3 0.00
5 *	•	•	•	•	•	•	•	•	•	•	1.4	1.3 0.00
6 *	•	•	•	•	•	•	•	•	•	•	1.4	1.3 0.00
7 *	•	•	•	•	•	•	•	•	. •	•	1.4	1.4 0.00
8 *			•	•	•	•	• .	•	•	•	1,4	1.4 0.00
9 *	•	•	:	•	•	•	•	•	. •	•	1.3	1.3 0.00
10 *	•	•			•		•	•	•	•	1.3 1.3	1.3 0.00 1.4 0.00
11 *	•	•	•			·		:	•	•	1.3	1.4 0.00
12 *	•	•	•	•	•	•	·			·	1.3	1.4 0.00
13 *	•	•	• .	•	•	•	•	•	•	·	1.2	1.4 0.00
14 *	•	•	• ,	•	•	•	• .	•,	•	•	1.2	1.5 .01
15 *	•	• ,	• .	, •	•	•	•	•.	•	•	1.2	1.5 0.00
16 * 17 *	•	•	•	•	• .	•	•	•	•	•	1.2	1.4 0.00
18 *	•	•	•	• ,	• .	•	•	• ,	• .	•	1.2	1.3 0.00
19 *	,•	•	•	•	•	•	•	•	•	•	1.1	1.3 0.00
20 *		•	•	•	•	•	•	•	•	•	1.1	1.1 0.00
21 *		•		•	•	•	•	•	•	•	1.1	1.1 0.00
22 *	•	•	·		•	•	•	•	•	•	1.1	.9 0.00
23 *	•	•	•	•	•		:	Ψ,	•	•	1.0	1.0 0.00 1.1 0.00
24 *	•	•	•	•	•	•	•		Ţ.	·	1.0	1.1 0.00
25 *	•	•	•	•	•	•	•	•		•	1.0	.9 0.00
26 *	•	• ,	•	•	•	•	•	•	•	•	1.0	.9 0.00
27 *	•	•	•	•	• .	•	•	•	•		1.0	.9 0.00
28 *	•	•	• 1	• •	•	• "	•	•	•	•	1.0	.9 0.00
29 *	•	•	•	•	•	•	•	•	•	•	1.0	1.0 0.00
30 *	•	•	•	•	•	• •		•	÷	. •	.9	1.1 0.00
31 *	•	•	•	•	1 · • · · · · · · · · · · · · · · · · ·	13 · 15	•	•	7.74	•	. 9	1.3 0.00

FEB-MAR	200.0	400.0	600.0	800.0	1000.0	12)0.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIL+MELT
1 #	•	•	•	•		•	•		•	•	. 9	1.5 0.00
2 *	•	•	•	•		•	•	•	•	•	• 9	1.5 0.00
3 *	•	•	•	•		•	•	•	•	•	. 9	1.4 0.00
4 *	•	•	•	•	•	•	• 50	•	•		. 9	1.3 .01
5 *	•	•	•		•	•	•	. •	•	•	. 9	1.1 .63
6 #	•	•	•	•	•	•	•		•	. •	. 9	1.3 .11
7 *		•		•	•	•	•	•	•	, •	. 9	1.5 .08
8 *	•	•		•	•	•	•		. •	•	.8	1.5 .00 1.5 0.00
9 ≉	•	٠	•	•	•	•	•	•	. •	•	. 8	
10 *	•	•	•	•	•	•	•			•	. 8	1.4 0.00
11 *	•		•	•	•	•	•	•	•	,•	. 8	1.4 0.00
12 *	• '	•	•	•	•	•	•	•	•	,,•	. 8	
13 *	•	•	•	.•	•	•	•	, •	•	•	. 8	1.4 0.00
14 *	•	•	•	•	•	•	•	•	•	•	. 7	1.3 0.00
15 *	. •	•		•	•	•	•	•	•	•	.7	1.4 0.00
16 *	.•	•	•	•	•	•	•	.,•	. 0	•	40.1	2.0 1.29
17 0 *	•	•	.•	•	, •	•	•		•	.•	112.1	4.7 0.00
18 0	* .	•	•	. •	•	•	•	•	•	•	8.6	2.3 0.00
19 *	•	•	•	•	•	•	•		.•	•	5.3	1.7 .11
5¢ ¢	•	•	•	•	• "	•	•	•	•	•	13.4	2.0 .13
21 0*	. •	•	•	•	•	•	•	•	•	•	4.3	2.1 .00
22 *	•	•	•	9	•	•	•	•	•	•	3.1	2.1 0.00
23 *	•	•	•	•	.•	•	•	•	•	•	2.5	1.8 .01
24 *	•	•	•	•	•	•	• 170	•	•	•	2.1	1.5 0.00
25 *	•	•	•	•	•	•	•	•	•	•	1.8	1.7 0.00
26 *	•	•	•	• .	•	•	•	•	•		1.6	1.7 0.00
27 *	•	•	•	•	•	•	•	•	•	•	1.4	1.4 0.00
28 ≠	•	•	•	•	•	•	•	•	·		1.3	1.4 0.00
1 *	•		•	•	•	•	•	:	•		1.2	1.4 .0.00
2 #	•	•	•	.•	•	•	•	•	•		1,1	1.5 0.00
3 *	•	•	•	•	•	•	•	•			1.0	1.7 0.00
4 *	•	•	•	•	•	• -					1.0	1.8 .05
5 *	•	• 1	•	•	•	•		·	•		1.0	15.0 0.00
6 *0	•	.•	•	•	•	·					, 9	2.5 0.00
7 * 8 *	•	•	•	•	, •	•		•	•	•	. 9	1.8 0.00
9 *	•	•	•	•	•	•		•	•	•	.9	1.4 0.00
10 *	•	•	•		·		•	•	•	•	. 8	1.4 0.00
11 *	•	•	•	•	·			•	•	•	. 8	1.4 0.00
12 *	•			•	•	•	•		•	•	. 8	1.7 0.00
13 *			•		•	•	•	•	•	•	.8	1.7 0.00
14 *		•			•	•	•	•	•	•	. 8	1.4 0.00
15 *				•		•	•	•	•	•	. 8	1.4 0.00
16 *	•			•	•	•	•	•	•	•	. 8	1.5 .04
17 *	•	•	•	•	•	•	•	•	•	•	3.6	2.3 .63
18 *	•	•	•	•	•	•	•	•	•	•	8.7	6.5 .03
19 #	•	•	•	•	•	•	•	•	•	•	1.9	2.9 .03
20 *	•	•	•	•		•	•	•	•	•	1.6	2.5 .21 3.5 0.00
21 *	•	•	•	. •	•	•	• 5	•	•	•	1.3	
22 *	•	• 1	. •	•	•	•	• 7	•	•	•	1.1	
23 *	•	•	•	•	•	•	•	•	•	•,	1.0	2.0 0.00 1.8 0.00
24 4	•	•	•	•	•	•	• '.	•	•	•	.9	1.8 .64
25 *	•	•	•	•	•	•	•	•	•	•	1.5	2.0 .45
26 *	•	•	•	•	•	•	•	•	•	•	2.1	2.3 0.00
27 *	•	•	•	•	•		•	•	•	• .	.9	2.1 0.00
28 *	•	•	•	•	•	•	•	•	. •	•	3.3	2.0 .37
29 ¥	•	•		•	•	•	•	. •	•	•	13.2	5.4 .44
30 0#	•	•	•	•	•	•	•	•		•	48.0	75.0 .26
31 . # 0	•	•	•	9.	•	•	•	•	•	•	70,0	, 540 120

JUN-J 1 *	UL	200.0		0.0	600.0	0 80	0.0	1000	. 0	12(0.	0 14	00.0	1600.	0 18	00.0	2000		SIM.		AIN+MELT
		•		• .	. •		•			•		• • ;	•		•	•		2.1	1.3	
2 0				•	•		•	•		•		• , ,			0	•		35.7		1.42
3.	*	0 .		•	•		•			. •		•			•	•		123.2	137.0	.12
4 .		•		•		* 0	•					•	•		•	•		638.1	705.0	2.45
5.		•		•	1.0		•	•		•		•	•		•	•		107.2	45.C	.04
6 .*		•		•	•		•	•		•		•			•			19.0	18.C	.07
7 .*		•		•	•		•	٠.		•			•		•			22.6	74.0	.35
6 • #		•		•			•			•			•		•			25.8	66.0	.24
9 *0	1	•		•	•		•	•		•					•	•		9.7	13.0	0.00
10 *		•		•	•		•	•		•								7.2	7.6	0.00
11 *		•		•	•		•	•		•			•		•			5.9	5.6	0.00
12 *		•		•	•		•	٠.		•		•						5.0	4.2	0.00
13 *		•		•	•		•	•		•		•			•			4.3	3.5	0.00
14 .		•		. *			. 0	٠		•								452.8	835.0	1.90
15 .		•		•	•		•			٠.		•						47.0	32.0	0.00
16 .*		•		•			•											11.7	15.0	6.00
17 #		•		•	•													8.6	10.0	0.00
18 *		•		•	•			٠.										7.0	8.7	0.00
19 *		•		•	•													5.8	7.0	0.00
20 ≉				•											•			5.0	6.0	0.00
21 *				•			•								·			4.3	5.1	0.00
22 *							•								•	_		3.8	4.2	0.00
23 *				•								•				•		3.5	3.5	0.00
24 *		•		•								•	:					3.2	2.9	0.00
25 *				•									•					3.0	2.9	.01
26 *				•			•	-		•		•	•		•	•	1	2.8		0.00
27 *				•						•		•	•		•	•		2.7		0.00
28 *				•	·					:		•	•		•	•		2.6	2.3	0.00
29 *				•			•			•		•	•		•	•		2.5	2.1	0.00
30 *				_	•		•	•		•		•	•		•	•		2.4	2.5	0.00
1 *				•	•			•		•	÷	•	•		•	•		2.3	2.0	0.00
2 *		·			•		•	•		•		•	•		•	•		2.3	1.8	0.00
3 *				-	•		•	•		•		•	•		•	•				0.00
4 *		•		-	•		•	•		•		•	•		•	•		2.2	1.8	0.00
5 *		•			•		•	•		•		•	•		•	•				
_	*	•		•	•		•	•		•		•	•		•			2.1	1.5	0.00
7.	•	o .		*	•		•	•		•		•	•		•	•		65.3	2.5	1.90 .76
8 0		•		-	•		•	•		•		•	•		•	•		401.7	149.0	0.00
90*		•		•	•		•	•		•		•	•		•	•		35.1	6.0	
10 0*		•		•	•		•	•		•		•	•		•	•		14.2	2.7	0.00
11 *		•		•	•		•	•		•		•	. •		•	•		10.9	2.0	0.00
12 0	*	•			•		•	•		•		•	•		•	•		8.6	1.7	.01
13.		•		•	•		•			•		•	•		•	•		44.5	5.7	.72
14 .	- 0	•	0*		•		•	•		•		•	•		•	•		84.2	126.0	1.23
15	. 🚾	.0	J-	•	•		-			•		•	•		•	. •		306.6	272.0	.54
16 .*		• •		•	•		•	. •		•		•	•		•	•		69.0	215.0	.17
17 0*		•		•	. •		•	•		•		•	•		•	•		15.8	26.0	0.00
18 *	•	•		•	•		•	•		•		•			•	. •		10.0	7.6	0.00
19 *		•		•	•		•	•		•		•	•		•	•		8.1	4.7	0.00
50 *		•		•	•		•	•		•		•	•		•	•		6.7	3.2	0.00
		•		•	. •		•	•		•		•	•		•	•		5.8	3.5	.24
21 .		•		•	•		•	•		•			•		•			84.9	38.0	.84
22 .0		•		•	•		•	, •				•	. •		•	•		58.5	28.0	.46
23 .*	•	•		•	. •		•	•		•		•	•		•	•		24.7	19.0	0.00
24 *		•		•	•		•	•		•		•			•			7.2	6.0	0.00
25 *		•		• '	•		•	•		•		•			•	•		5.7	3.5	0.00
26 *		•		•	•		• • •	•		•		•	•		•	•		4.9	2.7	0.00
27 *		•		•	•		•			•		•	•		•			4.3	2.1	0.00
28 *		•		•	•		•	•		.0		•	•		•	•		3.9	2.0	0.00
29 *		•		• ,	. •		•	•		. •		•	•		•	•		3.5	1.7	0.00
30 *		•		•			• ;					•	•			•		3.3	1.4	0.00
31 *		• ,		• .	. •		•			•		•	•		•			3.1	1.1	0.00

	JG-SEP	2	00,0	400	.0 6	00.0	800.0	1000	.0 122	0.0	1400.0	160	0.0 16	00.0	2000.0			RAIN+M	ELT
	2 #		• .	•		•	• "	•		•	• 1		•	•	•	2.9		0.00	
	3 *		•	•		•	•	•		•	•		•	•	•	2.8			
4			•	•	•	•	•	•		•	•		•	•	•,	2.7			
	*		•	•		•	•	•		•	•		• ,	•	•	2.6			
- 3	*		•	•		•	•	•		•	•		•	•	•	2.6			
7	*		:			•	•	•		.•	•		•	•	•	2.5			
8	*					:	•	•		•	•		• •	•	•	2.4			
9	<b>*</b> .		•			:	•			•	• .		•	•	•	2.4 2.3	• 6		
10	<b>*</b>		•					:			•		•	•	•	2.3	. 5 . 4		
11	. #		•					•			•		•	•	•	2.3			
12	*		•			•					•		•	•	•	2.3			
13	0*		•			•	•							:	•	21.2	. 8		
	0	*	•			•	•			•			•			139.9	1.3		
	0*		• .			•	•			•						25.0	1.3		
16			• -	•		• •	•			•	•		•	•		9.5	1.1		
17			•	•		•	•			•			•	•	•	7.4	.9		
18			•	•		•	•	•		•	•		•	•	•	6.1	.6		
19			•			•	•	•		•	•		•	•	•	5.1	. 4		
50			• 1	•		•	• 1	•		•	•		•	•	•	4.3	.4	0.00	
21			• •	•		•	•	•		•	•		•	•	•	3.8	.2		
22			•	•		•	•	•		•	•	,	•	•	•	3.6	. 4	. 24	
24			•	•		•	•	•		•	•		•	•	•	3.1	. 4		
25			•	•		•	•	• '		•	•	, (	• *	•	•	2.8	. 3		
26			•	, •		•	•	•		•	•	•	• '	•	•	2.6	.2		
27			•	•		•	•	•		•	•	•	,	• "	•	2.5	.1		
28			•	•		•	. •	•		•	•	•	• *	•	•	2.4	.1		
29			•	:		•	•	•		• .	•	•	•	•	•	2.3	0.0		
30				:		•	•	•		•	•	•		•	• ,	2.2	0.0	0.00	
31	*					:	•	•		•	•	•		•	•	2.2	0.0	.11	
1	*					:		•		:	•	•		•	•	2.1 2.0	0.0	0.00	
2	*		•								•			•	•	2.0	0.0	0.00	
3	0 *		•	•		•								:		33.7		1.41	
	0	*	•			•	•	•		•						126.4	4.7	.18	
	0*		• 1	•		•	•	•		•	•			•		13.1	1.0	0.00	
	*		•	•		•	•	•		•	•			•		8.1	. 4	0.00	
	0*	•	• .	•		•	•	• *		•	•			•	•	12.6	. 9	.47	
8			•	•		•	•	•		•	•	•		•	•	8.6	2.4	0.00	
	*		•	•		•	•	•		•	•	•		•		5.1	.4	0.00	
10			•	•		•	•	• 1		•	•	•		•	•	4.3	.1	0.00	
12			•	•		•	•	•		•	. •	•		•	•	3.7	. 1	.00	
13		-	•	•		•	•	• '		•	•	•		•	•	170.7	20.0	2.33	
14		*	•	•		•	•	•	)	•	•	•	*	•,	• *		1170.0	2.62	
15		-	-	•		•	•	•	•	•	•	•		• "	•	105.9	22.0	0.00	
16				•		•	•	•	•	•	•	•		•	•	21.2	8.7	0.00	
17			•	:		•	•	•		•	•	•		•	•	14.7	6.0	0.00	
18			•	:		•	-	•		•	•	•		• .	•	11.5 9.2	5.1	0.00	
19	*		•				·	•			•	•			•	7.5	4.2 3.5	0.00	
20	0 *		•	•		•	•			•	•	•			•	48.8		0.00	
21	0*		•	•		•	•			•					·	14.2	5.6	0.00	
22			•	•			•	•		,	•			•	:	6.0	3.2	0.00	
23			•	•		•	•	•		,				•	·	5.1	2.5	0.00	
24			•	•		•	•	•		,	•			•	•	4.5	2.7	.22	
25			•	•		•	•	•	•	,	•	•		•	•	4.1	4.8	0.00	
26		•	•	•		•	•	•		,	•			•	•	3.7	2.3	0.00	
27		*,	•	•		•	•	•	. •	,	•	•		•	•	184.6	11.0	1,20	
28		•	•	•		•	•	•	•	n e	•	•		•	. •	64.0	8.3	0.00	
29		_ '		• ,		0.00	•	. •		100	•	•		•		9.4	3.2	0.00	
., 0	• 0	~ (		•			•	1914	A BAR	Section 1	$(1,1,1,1) \bullet (1,1,1,1)$	ave to the		•		98.4	43.0	.59	

MEAN DAIL	Y FLOW PLOT	COUNCI	L CR 600.0	800.0	WATER YEAR 1000.0	1962 120(.0	*=SIMULATED 1400.0	0=CESE 1600.0	RVED 1800.0	UNITS-CFSD	SIM.	OBS. RAI	: N+MELT
1 0*	•	•	•.	•	•		•	•	•	•	23.8	5.1	.00
2 *	• •		•	•	•	•	•	•	•	•	7.2		.07
3 ≄	•	•	•	•	•		•	•	•	•	5.7		.00
4 *	•	•	•	•	•	• • •	•	•	•	•	4.9		.00
5 *	. •	•	. •	•	•	•	•	•	•	•	4.3		.00
6 *	. •	• •	. •	•	•	* * • · ·		•	•	•	3.9		.00
7 *	•		•	•	•	•	•	•	•	•	3.5		.00
8 *	. •		•	•	•	•	•	•	•	•	3.3		.00
9 *	•	. •	. •	•	•	•	•	•	•	•	3.2		.48
10 .	0 • *	•	•	•	•	•	•	•	•	•	282,2		.12
11 . 0*	•	•	•	•	•	•	•	•	•	•	67.8		.00
13 *	•	±1 • 1	•.	•	•	• •	•	•	•	•	10.4		.00
14 *	•	• •	•	•	• .	•	• •	. •	•	•	7.2		.00
15 *	•		•	•	•	• .	•	•	•	•	6.0		.00
16 *	•	•	•	•	•		•	•	•	•	5.1 4.4		.00
17 *	•	•	•	•	•	•		•	•	•	3.9		.00
18 *	•	. ·	•	•	• .	•	•	•	•	•	3.5		.00
19 *	•	•	•	•	•	•	•	•	•	•	3.3		.00
20 *	•		•	•		•		•	•	•	3.0		.00
21 *	•			•			i <b>®</b> in √	•	•	•	2.9		.00
22 *		•		•		•	N. A. S.	•	•	•	2.7		.00
23 *				•		·		•	•	•	2.6		.00
24 *			•				44.4	•		·	2.6		.00
25 *	•		•		·					·	2.5		.00
26 *	•			•		•					2.4		.00
27 *		•				•				·	2.4		.00
28 *	•	•	•	•	•	•					2.3		.00
29 *			•	•		•			•	•	2.3		.03
30 *	•	•	•	•	•	•	•		•	•	2.4		.29
31 *	•	•		•	•	•	•		•	•	2.4		.12
10 *	•	•	•	•		•	•	•	•		44.1	2.7	.86
2 .	•	· • *	. 0	. •	•	•	• 3	•	•	•	439.4	661.0 1	.05
3 • *	<sup>1</sup> , •	. •	•	•	•	•	•	•	•	•	44.0		.00
4, •	•	* * •	•	•	•	•	•	•	•	•	11.8		.00
5 *	•	a • "	•	•	•	• '	•	•	•	•	8.8		.00
6 *	•	•	•	•	•		•	•	•	•	7.1		.00
7 *	•	•	•	•	•	•	•	•	•	•	5.8		.00
8 *	• .	•	•	•	•	•	•	, •	•	•	4.9		.00
9 <b>*</b>	•	•	•	•	•	•	•	•	•	•	4.2		.00
10 *	•	•	•	•	•	•	•	•	•	•	3.8		.04
12 *	•	•	•	•	•	•	•	•	•	•	3.4		.00
13 *	•	•	•	•	•	•	•	•	•	•	3.1		.00
14 *	•	•	•	•		•		•	•	•	2.9		.00
15 . 0	*		•	•	•	•	<b>਼</b>	•		•	202.6		.16
16 .0*		•		•	•	•	, in the second		-	•	46.4		.00
17 *		•			• ,	•		•		•	7.6		.00
18 *			•		•				•	•	5.5		.07
19 *	·		•	·		a*	- 1		•	•	4.7		.01
20 *	•	•	•		•			•			4.0		.00
21 .	*. 0		•		•	·	•	•			181.3		.84
22 . 0*	•	•	•	•	•	9.	•	•	•		70.7		.01
23 *0		•	•		•		•	•		•	9.0		.00
24 *			•	•	•	•		•	•	•	5.7		.00
25 *	•	•	•	•	•			•	•	•	4.8		.00
26 *	•		•	•	•		•		•		4.1		.00
27 *		٠		•	•		•	•	•	•	3.6		.00
28 *	•	•	•	•		•	•	•	•		3.2		.00
29 *	•			4	•		•				3.0	6.5 0	
30 #	•			•	•	•	•	•	e	•	2.8	6.5 0	

FEB-MAR	200.0	400.0	600.	0 800	.0 1000	.0 1200	0 1400.0	1600.0	1800.0	2000.0	SIM.	OBS. RAIN+MEL	. T
1 *	•	•	•	•	•		•	•	•	•	1.0	4.7 0.00	
2 *	•		•			•			•	•	1.0	4.2 0.00	
3 *	•			•					•	•	1.0	4.2 0.00	
4 *	•	•		•		•	•	•	•		. 9	4.2 0.00	
5 *	•	•	•	•					•	•	9	3.8 6.00	
6 *	•	•	•	•		•	• 11		•	•	9	3.2 0.00	
7 *	•	•	•	•			•		•		. 9	3.5 0.00	
8 *	•		•	•		•	•	•	•	•	. 9	3.8 0.00	
9 *	•	. •	•						•	•	• 9	4.2 0.00	
10 *	•	. •	•	•	•		•	•	•	•	. 9	3.8 0.00	
11 *	•	. •	•	. •			•		•	•	. 8	4.2 0.00	
12 *	•	•	•	•			•	•	•		• 8	4.2 0.00	
13 *	•	•	•		5.4		•		•	•	. 8	4.2 0.00	
14 *	• ,	. •	•	•			•	•	•	•	. 8	3.8 0.00	
15 *	•	•	•		. •	•	• 13	•	•	•	1.1	6.0 .33	
16 *	, •	•	•	•			•	•	•	•	. 8	5.1 0.00	
17 *	•	•		•	•		•		•	•	. 8	4.7 0.00	
18 *	•	•	•	•	•		•	•	•	•	7	3.8 0.00	
19 *	•	•	•	. •	•		• 4	•	•	•	7	3.2 0.00	
20 *	•	•		•	•		•	•	•	•	. 7	2.9 .01	
21 *	•	•	•	•	•		•	•	•	•	.7	3.8 0.00	
22 *	•			•			•	•	•	•	. 7	3.2 0.00	
23 *	•	•		•	•		•	•	•	•	. 7	3.5 .06	
24 *	•	,•	•	. •	•		•	•	•	•	.7	3.2 0.00	
25 *	•	•	•	•	•		•	•	•	•	. 7	2.9 .03	
26 *	, •	•			7		•	•	•	•	. 7	3.5 0.00	
27 *	•	•	•	•	•	•	•	•	•	•	. 8	2.9 .18	
28 *	. •	•	. •	•	•	•	•	•		•	• 6	2.5 0.00	
1 *	•	•	•	•	•	- 1 · 1 · 1 · 1	•	•	•	•	. 6	2.7 0.00	
2 *	•	•	•	•	•	•	•	•	•	•	• 6	3.2 0.00	
3 *	•	•	•	. •	•		•	•	•	•	• 6	4.2 0.00	
4 *	•	•	•	•			•		•	•	. 6	4.2 0.00	
5 *	•	. •	•	•	•		•	•	•	•	• 5	2.9 0.00	
6 *	•		•	. •	•		•	•	•	•	. 5	2.7 0.00	
7 *	•	•	•	•	•	•	•	•	•	* •	• 5	3.2 0.00	
8 *	•	•	•	•		<b>,•</b>	•	•	•	•	. 5	3.5 0.00	
9 *	•	•	•	•	•	•	•	. •	•	•	. 5	3.2 0.00	
10 *	•	•	•	•	•	•	• 33	•	•		. 5	2.9 0.00	
11 *	• ,	•	. •	•		•	•	•	•	•	. 5	2.9 0.00	
12 *	•	•	•		•		•	•	•	. •	. 5	2.5 0.00	
13 *	•	•	•	. •		•	•	•	•	•	• 5	2.1 0.00	
14 *	•	•	•	•	•	•	•	•	•	•	• 4	2.1 0.00	
15 *	•	. 9	•	•		•	•	. • •	•	•	. 4	2.1 0.00	
16 *	•	•	•	•	•	•	•	•	•	•	• 4	2.5 0.00	
17 *	•	•	•	•		•	•	•	•	•	. 4	2.5 0.00	
16 *	•	. •	•	•	. 4	• •	• 1	•	•	•	. 4	2.7 0.00	
19 *	•	•	•	•		•	•	•	•	•	• 4	2.9 0.00	
20 *	•	•	•	•	•	•	•	. •	•	•	3.6	6.0 .59	
21 *	•	•	. •	•	•	•	•	•	•	•	1.0	6.0 0.00	
22 *	•		. •	, •	•	•	•	•	•	•	. 7	3.5 0.00	
23 *	•		•	•	•	•	•	•	•	•	6	3.2 0.00	
24 •*0	•	. •	•	0	•		•	•	•	•	23.0	45.0 .73	
25 . *0	•	• ,	•	, •	•	•	•	•	•	. •	43.4	61.0 .27	
26 *0	•	•	•	•	•	. •	•	•	•	•	6.1	14.0 0.00	
27 * 28 *	•	•	•	•	•	•	• ( )	•	•	•	4.0	7.6 0.00	
28 * 29 *	•	•	. •	. •	•	•	•	•	•	•	3.1	6.0 0.00	
30 *	•,	•	•	. •	•		•	•	•	•	2.4	5.1 0.00	
31 *	•		•	•		•	•	•	•	•	1.9	4.2 0.00	
31 4	•	•	•	•	•	•	•		•	•	1.6	3.8 0.00	

APR-MAY	200.0	400.0	600.0	800.0	1000.0	120(.0	1400.0	1600.0	1800.0	2000.0	SIM.	OBS.	RAIN+MELT
1 * 2 *	•	•	•	•	•	•	•	•	•	•	1.3		0.00
3 *	•	•	•	•	•	. •	•	• .	•	•	1.1	3.2	
4 *		•	:	•	•	•	•	•	•	•	1.0 .9	3.2 3.5	
5 *	•	•	•	•	•		•	•	•	•	.9	4.7	
6 *	•	•	•	•	•	•	•	•	•	•	. 8	5.1	
7 * 8 *	•	•	•	•	•	•	•	•	•	•	. 7	4.7	0.00
9 *	• .	•	•	•	•	•	•	•	•	•	.8	5.1	
10 .*	:	•	•	•	• .	•	•	•	•	•	. 6	4.2	
11 *0	•	•	•	•	•	•	•	•	•	•	15.9 3.9	24.0 15.0	
12 *	•		•	•		•	•	:	:		2.2	7.0	
13 *	•	•	•	•	•	•		•	•		1.7	5.6	
14 *	. •	•	•	•	•	•	•	•	•	•	1.4	5.1	0.00
15 * 16 *	•	•	•	•	•	•	•	•	•	•	1.2	5.1	0.00
17 *	•	•	•	•	•	•	•	• ·	•	•	1.0	4.2	0.00
18 *	•	•	•	•	•	•		•	•	•.	9	3.8	0.00
19 *	•	•	•	•	•		•	•	•	•	• 8	3.5	0.00
20 *	•			•			•	•	•	•	.7	3.5 3.2	0.00 .10
21 *	•	•	•	•	•		·			:	.6	2.9	.00
22 *	•	•	•	•	•	•	•	•	•	•	.7	2.9	.10
23 *	•	•	•	•	•	•	•		•	•	.6	2.9	0.00
24 * 25 *	•	•	•	•	•	•	•.	•	•	•	.6	2.9	0.00
26 *	•	•	•	•,	•	•	•	•	•	•	• 5	3.2	0.00
27 *	•	•	•	•	•	•	•	•	•	•	. 5	2.9	.04
28 * 0	•	•	•	•	•	:	•	•	•	•	.7 .5	7.5 32.0	.27 .03
29 *	•	•	•	•	•	·	·	•	•	•	• 5	5.1	0.00
30 ≉	•	•	•	•	•		•	•	•		.4	3.2	0.06
1 *	•	•	•	•	•	•	•	•	•	•	. 4	2.7	.03
2 &	•	•	•	•	•	•	•	•	•	•	. 4	2.3	0.00
3 # 4 *	•	•	•	•,	•	•	•	•	. •	• '	.4	2.1	0.00
5 *	•	•	•	•	•	•	•	•	•	•	. 4	2.0	0.00
6 *	•	•	•	•			•	•		•	. 4	1.8	0.00
7 *	•	•	•	•	·	·	•	•	•	•	.3	1.8	0.00
8 *	•	•	• .	•	•		•	•	·		. 3	1.7	0.00
9 *	•	•	•	•	•	•	•	•	•	•	. 3	1.5	0.00
10 *	0	•	•	•	•	•	•	•	•	•	. 3	1.4	0.00
11 * 12 *	•	•	•	•	•	•	•	•	•	•	. 3	1.3	0.00
13 #	•	•	•	•	•	•	•	•	•	•	. 3	1.3	0.00
14 #		•	•	•	•		•	•	•	•	. 3	1.1	0.00
15 #	•	•	•	•	•	•	•		•	•	.3 .3	1.0	0.00
16 *	•	•	•	9	•		•		•		.3	. 8	0.00
17 *	•	•	•	• .	•		•	•	•	. •	• 3	.8	0.00
18 *	•	•	•	•	•		•	•	•	•	. 3	.7	0.00
19 *	•	•	•	•	•	•	•	•	•	•	. 3	• 6	0.00
20 * 21 *	•	•	•	•	•	**	•	•	• -	•	. 3	• 5	0.00
22 *	•	•	•	•	•		•	•	•	•	. 3	. 4	0.00
23 *	•	•	•	•	:	11	•	•	•	•	• 3 • 2	• 3	0.00
24 *	•	•	•	•	•	•	•	•		. •	.2	.2	0.00
25 *	•	•	•	•	•	u	•	•	•	•	. 3	.2	.32
26 *	•	•	•	•		· " `	•	•	•	•	. 4	. 4	.03
27 * 28 • *	•	•	•	•	•	•	•	•	•	. •	3	. 4	.05
29 . *		•	•	•	• .	•	•	• •	•	•	51.5	186.0	2.42
30 0≉	•	•	•	•	•		•	•	•	•	99.0 15.3	94.0	.00
31 0*	•						•	•	•	•	10.6	3.5 1.8	0.00
			•	•	•			•	•	•	4000	700	0,00

JU!1-JUL	200.0	400.0	600.0	. 800.0	1000.0	1200.0	1400.0	1600.0	1800.0	2000.0		OBS. RAIN+MELT
1 . *		0 .		•	•	•	•	•	•	•	84.7	300.0 1.45
2 .	* .		- 0	•	•	•		•		•	164.8	591.037
3 . *	ο.	•	•			•	•	•	•	•	56.3	132.0 0.00
4 .≠				•	•	•	ė		•	. •	14.3	22.0 0.00
5 .¥	•	•	•	•	•	•	•	. •	•	•	10.6	11.0 0.00
6 *	•	٠	•	•	•	•	•	•	•	•	8.2	6.5 \ .00
7.	* O	•	•	•	•	. •	•	•	•	. •	202.4	242.0 1.27
8 . * C	•	•	•	•	•	•		•	•	• .	46.5	76.6 .36
9 .	•	•	ο.	* •	•	•	. •	•	•	•	75â.1	539.0 2.15
19 . 0*	2 •	v	•	٠	•	•	•		•	•	76.4	57.0 .61
12 .*0	•	•	•		•	• .	. •	•	• 1	•	17.9	31.0 .01
12 .*	•	•	•	•	•	•	•	•	•	•	12.6	11.0 0.00
13 *	•	•	•	•	•	•	•	•.	•	•	9.9	9.3 0.00
1 + *	•	•	•	•	•	•	•	•	•	•	8.0	s.1 \0.30
15 *	•	•	•		• .	•	•	•	•	•	6.5	3.7 00.00
15 *	•	•	•	•	•	•	•	•	٠	•	5.5	7.4 00.00
17 *	•	٧	•	•	•	•	• :	•	•	•	4.7	5.3 10.39
16 *	•	•	•	•	•		•	•	•	•	4.2	4.2
19 *	•	• .	•	•	•	•	•	•	•	•	3.7	2.9 .01
≥0 *	•	•	•	•	•	•	•	•	•	•	3.4	2.5 0.00
21 *	•	•	•	•	•	•	•	•	•	•	3.3	2.3 .22
22 0 *	•	•	• .	•	•	•			•	•	30.6	3.5 .79
23 →0	* .	• '	•	•	•	•	•	•	•	•	144.6	23.0 .37
24 09	•	•	•	•	•	9	•	•	•	•	14.4	2,9/0,00
25 ≉	•	•	•	•	•	•	•	•	•	•	5.6	2.5 6.00
26 ₩	•	•	•	•	•	•	•	•	•	•	5.4	2.3 0.00
27 *	•	•		•		¥	•	•	•	•	4.6	2.5 .01
25 ★	•		•	•	•	•	•	•	•	•	4.0	2.3 0.00
₹9 *	•	•	•	•	. •	•	•	•	•	•	3.6	2.1 .02
نم ثار	. •	•	• .	•	. •	•	•	•	•	•	3.3	2.1 0.00
1 4	•	•	•	•	• .	•	•		•	•	3.0	2.0 (0,80 1,7 (0.00
: 2 ≁	•	•	. •	•	•	•	•	•		•	2.5	
ે 3 ≖	. •			•	•	•	•	•	•	•	2.7	
4 4	•	•	•	•	•	•	•	•	• .	•	2.5	1.1 0.00
ં 5 ≆	•	•	•	•	•	•	•	•	•	•	2.5	1.3 .62 1.0 0.39
b <b>¥</b>	•	•	•	•	.* •	•	•	•	•	•	2.4	1.0 %.30 .7 0.00
7 *	•	•	•	•	•	•	•	•	•	•	2.4	.6 0.69
. 3 ∗	•		•	•	•	•	•	•	•	•	123.4	5.7 1.49
9.0	* .	•	•	•	•	•	•	•	•	•	217.2	9.9 .43
13 0	. *	•	٠	•	•	•	•	•	•	•	21.3	1.5 0.00
11 0*	٠	•	•	•	•	•	•	•	•	•	11.0	1.0 0.00
12.04	•	•	. •	•	•	•,	•	•	•	•	ĉ.ć	18 6,75
13 #	•	•	•	•	•	,	•	•	•	•	7.0	.5 0.00
14 4	•	•	•	•	•	•	•	•	•	•	5.8	1.0 .11
15 *	•	•	•	•	•	. •	•	•	•	•	4.8	9.9 .00
16 **	0 * .	• .	•	•	• • <u>·</u>		•		•	-	159.9	128.0 1.13
17 . 18 0*	U * •	•	•	•	•		•	•	•		17.1	2.9 0.30
10 0*	•		•	•	•	•	•	•		•	7.6	1.7 0.00
20 *	•	•	•						•		6.3	1.1 0.00
21 *	•		•	•	•		•			•	5.3	1.0 0.00
:02 ≠ :02 ≠	•		•				•	•	•	•	4.5	.7 0.00
23 *	•	•	•		. •		•	•	•	•	3.9	.7 0.00
24 .0	* •		•	•	•		•	•	•	•	131.9	19.0 1.28
25 0∗			•		•			•		•	27.7	5.0 0.00
26 *					•		•	9	•	•	7.8	1.4 0.00
27 *	•	•	•	•	•		•	•	•	9	6.2	1.0 .03
28 ×				•	•		•	•	•	•	5.2	1.1 .09
29 *						•	•	•	•	. •	4.4	1.4 6.00
30 ≠					•	•	•	•	•	•	3.9	1.7 .06
31 *	•			•	•		•	•	•	۰	3.6	2.7 .23

### 4

### MULTIYEAR STATISTICAL SUMMAR)

FLOWPOINT = COUNCIL CR

WATER 1EARS 1959 TO 1962

MONTH	SIMULATED MEAN	OBSERVED MEAN	BIAS (SIM MEAN -OBS MEAN)	PERCENT BIAS	1ST MOMENT (SIM)-1ST MOMENT(OBS)	MAXIMUM ERROR	STANDARD ERROR	PERCENT STANDARD ERROR	CORREL. COEFF	BEST FI OBS = A	T LINE + B *SIM B
OCTOBER	2.322	3.186	865	-27.132	1.816	-147.587	4.777	149.927	.985	-1.056	1.527
TOVEMBER	.327	.345	018	-5.337	.283	-6.275	•569	164.981	.949	<b>~.</b> 077	1.293
DECEMBER	.247	.237	.011	4.575	822	1.574	.135	57.009	.975	.050	.755
JANUARY	.057	.082	025	-30.948	767	1.481	.065	78.945	.382	.074	.142
FEBRUARY	.168	.158	.010	6.256	2.179	3.040	.317	200.702	.682	.021	.818
ARCH	.077	.203		-61.950	1.257	-3.388	.378	186.320	.456	.133	.911
APRIL	.053	.171	118	-58.930	781	-4.493	.423	248.069	.206	.125	.864
MAY	.475	.886	411	-46.412	4.531	.27.509	2.684	303.006	.490	.188	1.470
JUNE	.869	1.267	398	-31.436	1.290	.12.069	2.091	165.053	.831	.320	1.090
JULY	1.777	1.148	.629	54.759	-1.135	15.656	2.251	196.131	.832	112	.709
AUGUST	.412	.252	.160	63.332	4.985	9.920	1.269	503.079	.591	009	.634
SEPTEMBER		1.218		31.987	-3.015	16.897	2,462	202.103	.909	252	.914
WATER YEA	R .703	.767	064	-8.390	81.935	-:47.587	2.939	382.907	.940	351	1.591

\*\*NOTE...SUM OF (SIM-OBS)\*\*2 = 25809.....ROOT MEAN OF (SIM-OBS)\*\*2 = 4.203....\*\*

 FLO		NUMBER OF CASES OBSERVED	OBSERVED MEAN	SIMULATED MEAN	BIAS	PERCENT BIAS	MAXIMUM ERROR	STANDARD ERROR	PERCENT STANDARD ERROR	CORREL. COEFF	BEST FI	
. 0	1	1369	.105	.191	.086	82.640	9.920	.132	126.653	.330	.090	.074
1 -	1	4	1.076	2.332	1.256	116.686	2.907	.015	1.361	682	1.106	013
1 -	ī	ġ	1.290	1.727	.437	33.874	2.230	0.000	0.000	1.000	1.279	.006
ī -	2	14	1.877	2.215	.338	17.982	5.417	.273	14.548	236	1.951	033
2 -	4	22	3.238	4.357	1.119	34.550	15.656	.528	16.309	180	3.336	022
4	7	15	5.195	4.417	778	-14.979	7.249	.938	18.059	215	5.459	060
7 =	11	12	8.750	7.674	-1.076	-12,297	18.091	1.483	16.945	.201	8.436	.041
11 -	19	6	15.758	11.414	-4.344	-27.568	12.069	1.924	12.211	.419	14.359	.123
19 -	30	5	26.034	18.191	-7.843	-30.126	-27.509	3.863	14.838	163	27.055	<b>∞.</b> 056
ABOVE	30	5	91.407	59.249	-32.158	-35.181	- 147.587	20,332	22.244	.983	-29.333	2.038
 ABOVE	4	43	20.109	14.280	-5.829	-28.988	-147.587	14.598	72.597	.948	-4.300	1.709

### VI. CONCLUSIONS

The derivation of the initial NWSRFS soil moisture accounting parameters by the use of SCS estimated engineering soil properties is an effort to provide a practical and useful method. The SCS soil properties are readily available for many areas, and the NWSRFS verification computer program can quickly check the validity of the derived parameters. The derivation method will be readily adaptable to a computer solution; hence, the total parameter set could be computed easily. The computed zone parameters have a definite bias toward being larger than the optimum value; thus, all values should always be evaluated as to rationality. The derived parameters will be closely related to the physical characteristics of the basin, and the substitution of the parameters to basins with similar characteristics should valid. The use of this procedure should result in a considerable savings in man-hours and computer time.

As operational rainfall measurements from radar, automated gages, and high density networks come into being, the need for procedures to delineate changes in runoff-producing characteristics will be in demand, and SCS soil properties will be available for as small an areal distribution as is required. The procedure for parameter derivations presented in this study could be the answer.

## A. Recommendations for Future Work

Since there are many possible combinations of soil characteristics within a soil profile as well as aerially across a basin, the derivation procedures should be tested on a large number of widely scattered basins. An investigation of soil properties available from other sources should be pursued. The use of topography, climate, vegetative cover, and other pertinent physical basin characteristics to compute or adjust the parameters should be considered. Adjustments and additional variations in the rules for the computation of parameters will most likely be needed. After the procedures are widely tested and finalized, a computer program to reference a data file of SCS properties for all soils in a region will be a step toward greater efficiency.

#### **ACKNOWLEDGMENTS**

Thanks are due to Victor W. Hoffman, Hydrologist in Charge, for his encouragement during the author's basic research in relating physical parameters to a rainfall-runoff system while assigned to the Fort Worth River Forecast Center. Appreciation is also expressed to John M. Yates, past Hydrologist

in Charge of the Tulsa River Forecast Center, for his support and to Richard N. DeVries, the author's advisor at Oklahoma State University, for his assistance in the preparation of the basic text.

### REFERENCES

Burnash, R.J.C., Ferrel, R.L., and McGuire, R.A., A Generalized Streamflow Simulation System, Conceptual Modeling for Digital Computers, National Weather Service (U.S. Department of Commerce) and Department of Water Resources (State of California), Sacramento, Mar. 1973, 204 pp.

George, E.J., Reed, R.A., Johnson, E.W., and Ferber, A.E., "Shelterbelts and Windbreaks," Soil--The 1957 Yearbook of Agriculture, U.S. Department of Agriculture, Washington, D.C., 1957, pp. 715-721

Washington, D.C., 1957, pp. 715-721.
Green, D.W., Dabri, H., Weinaug, C.F., and Prill, R., "Numerical Modeling of Unsaturated Groundwater Flow and Comparison of the Model to a Field Experiment," Water Resources Research, Vol. 6, No. 3, June 1970, pp. 862-874.

Hanks, R.J., Klute, A., and Bresler, E., "A Numerical Method for Estimating Infiltration, Redistribution, Drainage, and Evaporation of Water From Soil," Water Resources Research, Vol. 5, No. 5, Oct. 1969, pp. 1064-1069.

Linsley, Ray K., Jr., Kohler, Max A., and Paulhus, Joseph L.H., "Chapter 8, Runoff Relations," *Hydrology for Engineers*, McGraw-Hill Book Co., Inc., New York, N.Y., 1958, pp. 169-181.

Peck, Eugene L., "Catchment Modeling and Initial Parameter Estimation for the National Weather Service River Forecast System," NOAA Technical Memorandum NWS HYDRO 31, Office of Hydrology, National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, Md., June 1976, 9 pp. plus appendixes A through D.

Richards, L.A., and Richards, S.J., "Soil Moisture," Soil-The 1957 Yearbook of Agriculture, U.S. Department of Agriculture, Washington, D.C., 1957, pp. 49-66.

Soil Conservation Service, "Hydrology," SCS National Engineering Handbook, Section 4, Part 1, U.S. Department of Agriculture, Washington, D.C., Aug. 1964, pp. 7.1-7.11.

Staff, Hydrologic Research Laboratory, "National Weather Service River Forecast System Procedures," NOAA Technical Memorandum NWS HYDRO 14, Office of Hydrology, National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, Md., Dec. 1972, 7 chapters plus appendixes A through I.

- Swafford, B., Soil Survey of Garfield County, Oklahoma, Soil Conservation Service (U.S. Department of Agriculture) in cooperation with the Oklahoma Agricultural Experiment Station, Stillwater, Okla., Oct. 1967, 57 pp.
- Todd, David Keith, Ground Water Hydrology, John Wiley and Sons, Inc., New York, N.Y., 1959, 336 pp.
- Walton, William C., Ground Water Resource Evaluation, McGraw-Hill Book Co., Inc., New York, N.Y., 1970, 664 pp.

# APPENDIX I. COMPUTER PROGRAM LISTING OF A NWSRFS SOIL MOISTURE ACCOUNTING SUBROUTINE

```
SUBROUTINE LAND(ID1.IP1.ID2.IP2.MUSM.ICUUNT.IRG)
NWSRES SOIL MOISTURE ACCOUNTING PROCEDURE BASED ON SOIL MOISTURE ACCOUNTING IN THE SACRAMENTO MODEL
LAND VARIABLES
              LZTWC.LZFPC.LZFSC.LZTWC1.LZFPC1.LZFSC1.LZTWM.LZFPM.LZFSM.LZPK
       1.LZŠK
C
        DIMENSION MOSM(8.2). EPDIST(4)
   GENERAL PROGRAM VARIABLES
       INTEGER ROUTE.SNOW.SNOWA.YRIN.YR1.STURE.YEAR.PLT6HR.SAVEFW.COMPAK.1PTEST.PLOT.CTEST.SIXIN.OBSER.STDA.STP6.YK2.STAT.PEG
        REAL INFRO
C
       COMMON /G/ MONTH.MOIN.LAST.KUUTE.NGAGES.SNOW.SNOWA(12).YRIN.NPEGS.1YR1.NPTS.STORE.BASIN(20).YFAR.SSF(3.12).SUF(3.12).PLT6HR.SAVEFW.2COMPAR(3).PTEST.PLOT(3).LINEP.INFRU(20).PLOTMX(3).CTEST.FSFLUW(3).3PEG(5).STAT.YR2.AREA(6).SIXIN(3).DBSER(3).STDA(2.10).STDA(2.10).
       4IYFAR1(3),IPT.METRIC(3),NQ24,NQ6,NPTSUP,IQ24IN(3),IQ6IN(3)
    SOIL MOISTURE ACCOUNTING VARIABLES.
        COMMON/SOIL/BAL(5), PL(5,18), VL(5,6), SL(5,10), E(5,12,31)
   TIME SERIES IDENTIFICATIONS AND DESCRIPTIONS.
       COMMON /TSID/ AID(5.3).ANAME(5.5).PEID(3.3).FPNAME(3.5).FPID(3.3).1024ID(3.3).Q6ID(3.3).UPFWID(3.3).PXID(5.3)
   BASIC DATA ARRAYS
        COMMON /RD/ PX(5,4,31),TA(5,4,31),PE(3,31),RU(5,4,31),UFW6(3,4,31)
       1.SFW6(3.4.31).UFW6(3.4.31).UFW24(3.31)
  SNOW AND LAND COMMON BLOCK
        COMMON/SL/COVER(5.31).EFC(5).PXADJ(5).NTAG.NWEGDATA EPDIST/0.0.0.33.0.67.0.0/
ç
        IPRINT=0
        IF ((MONTH.E0.MOSM(ICUUNT.1)).AND.(YEAR.E0.MUSM(ICUUNT.2)))IPRINT=1
        IF(IPRINT.EQ.O) GO TU 200
С
        PRINT 900.MONTH.YEAR. (ANAME(IRG.I).I=1.5)
  900 FORMAT(1H1.33HSIX-HOUR SOIL MOISTURE OUTPUT FUP.1X.12.1H/.14.2X.5A 14.20X.39HUNITS OF ALL QUANTITIES ARE MILLIMETERS)
  902 FORMAT(IH .5X.19HPERC IS PERCULATION,5X.31HBASEFW IS THE CHANNEL C. 10MPONENT.5X.67HTOTAL-RO IS CHANNEL INFLOW MINUS EL FRUM THE AREA D. 2EFINED BY SARVA.)
C
        PRINT 901
  901 FORMAT(1H .3HDAY.1X.2HPD.2X.5HUZTWC.2X.5HUZFWC.2X.5HLZTWC.2X.5HLZF
1SC.2X.5HLZFPC.2X.5HADIMC.4X.4HPERC.1X.7HIMPV-RO.2X.6HDIRECT.2X.6HS
2UR-RO.1X.7HINTERFW.2X.6HBASEFW.1X.8HTOTAL-RO.1X.7HET-DEMD.1X.6HACT
       3-ET.2X.9HRAIN+MFLT)
```

C

```
200
            SRNT=0.0
            SKUI=0.0
SIMPVT=0.0
SRODT=0.0
SROST=0.0
SINTFT=0.0
SGWFT=0.0
            SRFCHT=0.0
            SETT=0.0
            SPRT=0.0
            SPET=0.0
CCC
            INTIAL VALUES OF VARIABLES
            HZTWC=VL(IRG.1)
            UZFWC=VL(IRG.2)
LZTWC=VL(IRG.3)
LZFPC=VL(IRG.5)
LZFSC=VL(IRG.4)
            ADIMC=VL(IRG.6)
UZTWC1=UZTWC
UZFWC1=UZFWC
C
            LZTWC1=LZTWC
LZFPC1=LZFPC
LZFSC1=LZFSC
C
            ADIMC1 = ADIMC
CCC
             INITIAL VALUES OF PARAMETERS
            PPADJ=PL(IRG.1)
PEADJ=PL(IRG.2)
UZTWM=PL(IRG.3)
UZFWM=PL(IRG.4)
UZK=PL(IRG.5)
ZPERC=PL(IRG.9)
REXP=PL(IRG.10)
PCTIM=PL(IRG.67)
             ADIMP=PL(IRG.7)
SARVA=PL(IRG.8)
            ZTWM=PL(IRG.11)

LZTPM=PL(IRG.11)

LZTPM=PL(IRG.12)

LZFSM=PL(IRG.12)

LZPK=PL(IRG.14)

PFREE=PL(IRG.14)

PFREE=PL(IRG.17)

SIDE=PL(IRG.18)
 С
             WATSF=SARVA
             SARRA=0.0
 C
             IF(SARVA.LE.PCTIM) GO TO 201 WATSF=PCTIM
             SARRA=SARVA-PCTIM
 C
     201 IGPE=PEG(IRG)
EFCT=EFC(IRG)
             SAVED=RSERV*(LZFPM+LZFSM)
PAREA=1.0-PCTIM-ADIMP
             IP6=IP1
IDA=ID1
GO TO 204
 C **********************************
```

```
REGINNING OF 6 HOUR AND DAY LUOP
          *******************
Č
  205 IF(IP6.NE.1) GO TO 210
204 IF(IGPE.GT.0) GO TO 206
•--
CCC
      NO PE INPUT. THUS PE IS OBTAIN FROM MEAN SEASONAL CURVE.
      EP=E(IRG, MONTH, IDA)
GO TO 207
CCC
      DAILY PE TIME SERIES IS AVAILABLE
  206 EP=PE(IGPE,IDA)
  EP=EP*E(IRG.MONTH.IDA)
207 EP=EP*PEADJ
       SPET=SPET+EP
С
       IF(SNOW.EQ.1) EP=EFCT*EP+(1.0-EFCT)*(1.0-COVEK(IRG,IDA))*EP
  210 IF((SNOW.EO.1).AND.(SNOWA(MONTH).EQ.1)) GO TO 219
PX6 = PX(IRG.IP6.IDA)*PPADJ
GO TO 215
       IF SNOW IS BEING CONSIDERED. PXADJ HAS ALREADY BEEN APPLIED
  219 PX6 = PX(IRG*IP6*IDA)
  215 SPRT=SPRT+PX6
      PX6 IS THE SIX HOUR RAINFALL OR SNOW COVER OUTFLOW
FDMND=EP*EPDIST(IP6)
      E1=EDMND*(UZTWC/UZTWM)
      RED=EDMND-E1
C
      RED IS RESIDUAL EVAP DEMAND
      UZTWC=UZTWC-E1
      IF(UZTWC.GE.O.) GO TO 220
C
Ć
      E1 CAN NOT EXCEED UZTWC
      E1=E1+UZTWC
UZTWC=0.0
RED=EDMND-E1
       ÎF(UZFWC.GE.RED) GU TO 221
0000
0000
      E2 IS EVAP FROM UZFWC.
      E2=UZFWC
      UZFWC=0.0
RED=RED-E2
      GÑ TN 225
C
  221
      E2=RED
UZFWC=UZFWC-E2
      RED=0.0
  220 IF((UZTWC/UZTWM).GE.(UZFWC/UZFWM)) GO-TO 225
```

```
00000
       UPPER ZUNE FREE WATER RATIO EXCLEDS UPPER ZUNE TENSION WATER RATIO. THUS TRANSFER FREE WATER TO TENSION
       UZRAT=(UZTWC+UZFWC)/(UZTWM+UZFWM)
       UZTWC=UZTWM*UZRAT
UZFWC=UZFWM*UZRAT
00000
       COMPUTE ET FROM ADIMP AREA.-E5
   225 E5=E1+(KED+E2)*((ADIMC-E1-UZTWC)/(UZTWM+LZTWM))
COCCO
       COMPUTE ET FROM LZTWC (E3)
       F3=RFD*(LZTWC/(UZTWM+LZTWM))
       LZTWC=LZTWC-E3
IF(LZTWC.GE.O.O) GO TO 226
       E3 CAN NOT EXCEED LZTWC
Č
       E3=E3+LZTWC
       LZTWC=0.0
C
Č.
  226 RATLIT
       RATLZT=LZTWC/LZTWM
RATLZ=(LZTWC+LZFPC+LZFSC-SAVE;))/(LZTWM+LZFPM+LZFSM-SAVED)
       IF(RATLZT.GE.RATLZ) GU TU 230
0000
       RESUPPLY LOWER ZONE TENSION WATER FROM LOWER = ZONE FREE WATER IF MORE WATER AVAILABLE THERE.
       DEL=(RATLZ-RATLZT)*LZTWM
CCC
       TRANSFER FROM LZFSC TO LZTWC.
       LZTWC=LZTWC+DEL
       LZFSC=LZFSC-DEL
IF(LZFSC•GE•O•O) GO TO 230
000
       IF TRANSFER EXCEEDS LZFSC THEN REMAINDER COMES FRUM LZFPC
       LZFPC=LZFPC+LZFSC
       LZFSC=0.0
C
Č.
  230 ROIMP=PX6*PCTIM
CCC
        ROIMP IS RUNOFF FROM THE MINIMUM IMPERVIOUS AREA.
       SIMPVT=SIMPVT+ROIMP
CCC
        ADJUST ADIMC. ADDITIONAL IMPERVIOUS AREA STORAGE, FOR EVAPORATION.
       ADIMC=ADIMC-E5
       IF(ADIMC.GE.O.O) GO TO 231
00000
       F5 CAN NOT EXCEED ADIMC.
       E5=E5+ADIMC
       ADIMC=0.0
  231 E5=E5*ADIMP
CCC
       F5 IS ET FROM THE AREA ADIMP.
       PAV=PX6+UZTWC-UZTWM
CCC
       PAV IS THE PERIOD, AVAILABLE MUISTURE IN EXCESS
       OF UŽŤW REQUIREMENTS.
```

```
IF(PAV.GE.O.O) GO TO 232
          ALL MOISTURE HELD IN UZTW--NO EXCESS.
         UZTWC=UZTWC+PX6
         PAV=0.0
GO TO 233
           MOISTURE AVAILABLE IN EXCESS OF UZTW STORAGE.
   232 UZTWC=UZTWM
233 ADIMC=ADIMC+PX6-PAV
C***************
          SRF=0.0
SSUR=0.0
         SIF=0.0
SPERC=0.0
          SDRN=0.0
C
         NINC=1.0+0.2*(UZFWC+PAV).
000000
         NINC=NUMBER OF TIME INCREMENTS THAT THE SIX -
HOUR PERIOD IS DIVIDED INTO FOR FURTHER
SOIL-MOISTURE ACCOUNTING. NO ONE PERIOD
WILL EXCEFD 5.0 MILLIMETERS OF UZFWC+PAV
         DINC=(1.0/NINC)*0.25
CCC
         DINC=LENGTH OF EACH INCREMENT IN DAYS.
         PINC=PAV/NINC
000000
         PINC=AMOUNT OF AVAILABLE MOISTURE FOR EACH INCREMENT.
COMPUTE FREE WATER DEPLETION FRACTIONS FOR
THE TIME INTERVAL BEING USED-BASIC DEPLETIONS
ARE FOR ONE DAY
         DUZ=1.0-((1.0-UZK)**DINC)
DLZP=1.0-((1.0-LZPK)**DINC)
         DLZS=1.0-((1.0-LZSK)**DINC)
0000
         DO 240 IC=1.NINC
C
         PAV=PINC
         ADSUR=0.0
RATIO=(ADIMC-UZTWC)/LZTWM
ADDRO=PINC*(RATIO**2)
          SDRD=SDRO+ADDRO*ADIMP
         ADDRO IS THE AMOUNT OF DIRECT RUNOFF FROM THE AREA ADIMP-SDRO IS THE SIX HOUR SUMMATION COMPUTE BASEFLOW AND KEEP TRACK OF SIX-HOUR SUM.
         BF=LZFPC*DLZP
LZFPC=LZFPC-BF
C
          IF (LZFPC.GT.0.0001) GU TO 234
C
         BF=BF+LZFPC
         LZFPC=0.0
C
         SRF=SRF+BF
BF=LZFSC*DLZS
         LZFSC=LZFSC-BF
C
          IF(LZFSC.GT.0.0001) GO TO 235
```

```
BF=BF+LZFSC
       LZFSC=0.0
С
  235 SBE=SBE+BE
00000
         COMPUTE PERCOLATION-IF NO WATER AVAILABLE THEN SKIP
        IF((PINC+UZFWC).GT.0.01) GO TO 251
C
       UZEWC=UZEWC+PINC
       GO TO 249
C
  251 PERCM=LZFPM*DLZP+LZFSM*DLZS
PERC=PERCM*(UZFWC/UZFWM)
       DEFR=1.0-((LZTWC+LZFPC+LZFSC)/(LZTWM+LZFPM+LZFSM))
CCC
       DEFR IS THE LOWER ZONE MOISTURE DEFICIENCY KATIU
       PERC=PERC*(1.0+ZPERC*(DEFR**REXP))
CCC
       NOTE...PERCOLATION OCCURS FROM UZFWC BEFORE PAV IS ADDED.
        IF(PERC.LT.UZEWC) GO TO 241
        PERCULATION RATE EXCEEDS UZEWC.
       PERC=UZFWC
       UZFWC=0.0
GO TO 247
CCC
       PERCOLATION RATE IS LESS THAT UZFWC.
  241 UZFWC=UZFWC-PEKC
C
C
C
       CHECK TO SEE IF PERCOLATION EXCEEDS LOWER ZONE DEFICIENCY.
       CHECK=LZTWC+LZFPC+LZFSC+PEKC-LZTWM-LZFPM-LZFSM
C
  IF(CHECK.LE.O.O) GO TO 242
PERC=PERC-CHECK
UZFWC=U7FWC+CHECK
242 SPERC=SPERC+PERC
00000000
        SPERC IS THE SIX HOUR SUMMATION OF PERC
       COMPUTE INTERFLOW AND KEEP TRACK OF SIX HOUR SUM.
       NOTE ... PAV HAS NOT YET BEEN ADDED.
       DEL=UZFWC*DUZ
SIF=SIF+DEL
UZFWC=UZFWC-DFL
000000
       DISTRIBE PERCOLATED WATER INTO THE LOWER ZONES TENSION WATER MUST BE FILLED FIRST EXCEPT FOR THE PERCE AREA.
  247 VPERC=PERC
       PERC=PERC*(1.0-PFREE)
C
       IF((PERC+LZTWC).GT.LZTWM) GO TO 243
LZTWC=LZTWC+PERC
       PERC=0.0
GI) TO 244
  243 PERC=PERC+LZTWC-LZTWM
       LZTWC=LZTWM
CCC
        DISTRIBUTE PERCOLATION IN EXCESS OF TENSION REQUIREMENTS AMONG THE FREE WATER STORAGES.
```

```
244 PERC=PERC+VPERC*PFREE
         IF(PERC.FQ.0.0) GO TO 245
HPL=LZFPM/(LZFPM+LZFSM)
0000
         HRL IS THE RELATIVE SIZE OF THE PRIMARY STORAGE AS COMPARED WITH TOTAL LOWER ZONE FREE WATER STORAGE.
         RATLP=LZFPC/LZFPM
RATLS=LZFSC/LZFSM
00000
         RATLP AND RATLS ARE CONTENT TO CAPACITY RATIOS. OR IN OTHER WURDS. THE RELATIVE FULLNESS OF EACH STORAGE
         PERCP=PERC*((HPL*2.0*(1.0-RATLP))/((1.0-RATLP)+(1.0-RATLS)))
         PERCS=PERC-PERCP
00000
         PERCP AND PERCS ARE THE AMOUNT OF THE EXCESS PERCOLATION GOING TO PRIMARY AND SUPPLEMENTAL STORGES • RESPECTIVELY •
         LZFSC=LZFSC+PERCS
C
         IF(LZFSC.LE.LZFSM) G() T() 246
PERCS=PERCS-LZFSC+LZFSM
LZFSC=LZFSM
C
   246 LZFPC=LZFPC+(PERC-PERCS)
C
0000
          DISTRIBUTE PAV BETWEEN UZFWC AND SURFACE RUNOFF.
   245 IF(PAV.EQ.O.O) GO TO 249
CCC
         CHECK IF PAV EXCEEDS UZFWM
         IF((PAV+UZFWC).GT.UZFWM) GO TO 248
        NO SURFACE RUNDER
        UZFWC=UZFWC+PAV
GO TO 249
00000
        COMPUTE SURFACE RUNOFF AND KEEP TRACK OF SIX HOUR SUM
   248 PAV=PAV+UZFWC-UZFWM
        UZFWC=UZFWM
         SSUR=SSUR+PAV*PAREA
         ADSUR=PAV*(1.0-ADDRO/PINC)
        ADSUR IS THE AMOUNT OF SURFACE RUNOFF WHICH COMES FROM THAT PORTION OF ADIMP WHICH IS NOT CURRENTLY GENERATING DIRECT RUNOFF. ADDRU/PINC IS THE FRACTION OF ADIMP CURRENTLY GENERATING
        DIRECT RUNDEF.
   SSUR=SSUR+ADSUR*ADIMP
249 ADIMC=ADIMC+PINC-ADDRO-ADSUR
C
   240 CONTINUE
        END OF INCREMENTAL DO LOOP.
```

```
COMPUTE SUMS AND ADJUST RUNDER AMOUNTS BY THE AREA OVER
C
       WHICH THEY ARE GENERATED.
Ĉ
       EUSED=E1+E2+E3
CCC
       EUSED IS THE ET FRUM PAREA WHICH IS 1.0-ADIMP-PCTIM
       SIF=SIF*PAREA
0000
       SEPARATE CHANNEL COMPONENT OF BASEFLOW
       FROM THE NON-CHANNEL COMPONENT
       TBF=SHF*PAREA
CCC
       TBF IS TOTAL BASEFLOW
       BFCC=TBF*(1.0/(1.0+SIDE))
Ç
       BECC IS BASEFLOW. CHANNEL COMPONENT
       BENCC=THE-BECC
00000000
       BENCC IS BASEFLOW.NON-CHANNEL COMPONENT
       ADD TO MONTHLY SUMS.
       SINTFT=SINTFT+SIF
       SGWET=SGWET+BECC
SRECHT=SRECHT+BENCC
       SROST=SROST+SSUR
SRODT=SRODT+SDRO
CCCC
       COMPUTE TOTAL CHANNEL INFLOW FOR THE SIX-HOUR PERIOD.
       TCI=R()IMP+SDR()+SSUR+SIF+BFCC
C
C
C
       COMPUTE E4-ET FROM STREAM SURFACES AND RIPARIAN VEGETATION.
       E4=EDMND*WATSF+(EDMND-EUSED)*SARRA
CCC
       SUBTRACT E4 FROM CHANNEL INFLOW
        TCI=TCI-F4
       iFiTCI.GE.0.0) GO TO 250
E4=E4+TCI
        TCI=0.0
CCC
        COMPUTE TOTAL EVAPOTRANSPIRATION-TET
   250 FUSED=FUSED*PAREA
        TET=EUSED+E5+E4
        SFTT=SETT+TET
Ċ.
        RO(IRG \cdot IP6 \cdot IDA) = TCI
 C
Ç.
        SROT=SKOT+TCI
 C
         PRINT SIX-HOUR ACCOUNTING VALUES IF REQUESTED.
č
   IF(IPRINT.EQ.1) PRINT 903.IDA.IP6.UZTWC.UZFWC.LZTWC.LZFSC.LZFPC.AD
1IMC.SPERC.RDIMP.SDRU.SSUR.SIF.BFCC.TCI.EDMND.TET.PX6
903 FORMAT(1H .213.6F7.1.7F8.2.3F8.1)
 C
        IF((IDA.EQ.ID2).AND.(IP6.EQ.IP2)) GO TO 270
        IP6=IP6+1
C
```

```
IF(IP6.LE.4) GO TO 205
С
           IP6=1
           IDA=IDA+1
           GO TO 205
270 IF(IRG.NE.NGAGES) GO TO 271
IF((IPRINT.EQ.1).AND.(ICUUNT.LT.8)) ICOUNT=ICOUNT+1
271 IPRINT=0
000
           COMPUTE MONTHLY WATER BALANCE FOR AREAL SUIL MOISTURE ACCOUNTING.
          BAL(IRG)=(UZTWC+UZFWC+LZTWC+LZFPC+LZFSC-UZTWC1-UZFWC1-LZTWC1-LZFPC11-LZFSC1)*PARFA+(ADIMC-ADIMC1)*ADIMP+SROT+SRECHT+SETT-SPRT
0
0
0
0
           SL(IRG.1) = SRUT

SL(IRG.2) = SIMPVT

SL(IRG.3) = SRUDT

SL(IRG.4) = SRDST

SL(IRG.5) = SINTET

SL(IRG.6) = SGWET

SL(IRG.8) = SPRT

SL(IRG.8) = SPRT

SL(IRG.9) = SPET
           SL(IRG.9)=SPET
SL(IRG.10)=SETT
           SL(IRG.1)=UZTWC
VL(IRG.2)=UZTWC
VL(IRG.3)=LZTWC
VL(IRG.5)=LZTWC
VL(IRG.6)=LZFPC
VL(IRG.6)=ADIMC
 Ç
            RETURN
 С
            END
```

#### (Continued from inside front cover)

- WS HYDRO 16 A Dynamic Model of Stage-Discharge Relations Affected by Changing Discharge. D. L. Fread, November 1973 (revised, October 1976), 38 pp. plus appendixes A and B. (COM-74-10818)
- WS HYDRO 17 National Weather Service River Forecast System--Snow Accumulation and Ablation Model. Eric A. Anderson, November 1973, 5 chapters plus appendixes A through H. (COM-74-10728)
- WS HYDRO 18 Numerical Properties of Implicit Four-Point Finite Difference Equations of Unsteady Flow. D. L. Fread, March 1974, 38 pp. (COM-74-11691)
- WS HYDRO 19 Storm Tide Frequency Analysis for the Coast of Georgia. Francis P. Ho, September 1974, 28 pp. (COM-74-11746/AS)
- WS HYDRO 20 Storm Tide Frequency Analysis for the Gulf Coast of Florida From Cape San Blas to St. Petersburg Beach. Francis P. Ho and Robert J. Tracey, April 1975, 34 pp. (COM-75-10901/AS)
- WS HYDRO 21 Storm Tide Frequency Analysis for the Coast of North Carolina, South of Cape Lookout. Francis P. Ho and Robert J. Tracey, May 1975, 44 pp. (COM-75-11000/AS)
- √S HYDRO 22 Annotated Bibliography of NOAA Publications of Hydrometeorological Interest. John F. Miller, May 1975, 50 pp. (Superseded by NWS HYDRO 34)
- VS HYDRO 23 Storm Tide Frequency Analysis for the Coast of Puerto Rico. Francis P. Ho, May 1975, 43 pp. (COM-11001/AS)
- VS HYDRO 24 The Flood of April 1974 in Southern Mississippi and Southeastern Louisiana. Edwin H. Chin, August 1975, 45 pp. (COM-75-11387/AS)
- 7S HYDRO 25 The Use of a Multizone Hydrologic Model With Distributed Rainfall and Distributed Parameters in the National Weather Service River Forecast System. David G. Morris, August 1975, 15 pp. (COM-75-11361/AS)
- 7S HYDRO 26 Moisture Source for Three Extreme Local Rainfalls in the Southern Intermountain Region. E. Marshall Hansen, November 1975, 57 pp. (PB-248-433)
- 'S HYDRO 27 Storm Tide Frequency Analysis for the Coast of North Carolina, North of Cape Lookout. Francis P. Ho and Robert J. Tracey, November 1975, 46 pp. (PB-247-900)
- 'S HYDRO 28 Flood Damage Reduction Potential of River Forecast Services in the Connecticut River Basin. Harold J. Day and Kwang K. Lee, February 1976, 52 pp. (PB-256-758)
- 'S HYDRO 29 Water Available for Runoff for 4 to 15 Days Duration in the Snake River Basin in Idaho. Ralph H. Frederick and Robert J. Tracey, June 1976, 39 pp. (PB-258-427)
- S HYDRO 30 Meteor Burst Communication System--Alaska Winter Field Test Program. Henry S. Santeford, March 1976, 51 pp. (PB-260-449)
- S HYDRO 31 Catchment Modeling and Initial Parameter Estimation for the National Weather Service River Forecast System. Eugene L. Peck, June 1976, 9 pp. plus appendixes A through D. (PB-264-154)
- S HYDRO 32 Storm Tide Frequency Analysis for the Open Coast of Virginia, Maryland, and Delaware. Francis P. Ho, Robert J. Tracey, Vance A. Myers, and Normalee S. Foat, August 1976, 52 pp. (PB261969)
- S HYDRO 33 Greatest Known Areal Storm Rainfall Depths for the Contiguous United States. Albert P. Shipe and John T. Riedel, December 1976, 174 pp. (PB-268-871)
- S HYDRO 34 Annotated Bibliography of NOAA Publications of Hydrometeorological Interest. John F. Miller, April 1977, 65 pp. (PB-268-846)
- S HYDRO 35 Five- to 60-Minute Precipitation Frequency for the Eastern and Central United States. Ralph H. Frederick, Vance A. Myers, and Eugene P. Auciello, June 1977, 36 pp.
- 5 HYDRO 36 Determination of Flood Forecast Effectiveness by the Use of Mean Forecast Lead Time. Walter T. Sittner, August 1977, 22 pp.
- 3 HYDRO 37 Derivation of Initial Soil Moisture Accounting Parameters From Soil Propertiess for the National Weather Service River Forecast System. Bobby L. Armstrong, March 1978, 53 pp. (PB-280-710)